


B684-A80-LAS1

Blade Server - Intel® Xeon® 6900 - 6U 10-Node DP 20-Bay E3.S Gen5 NVMe DLC

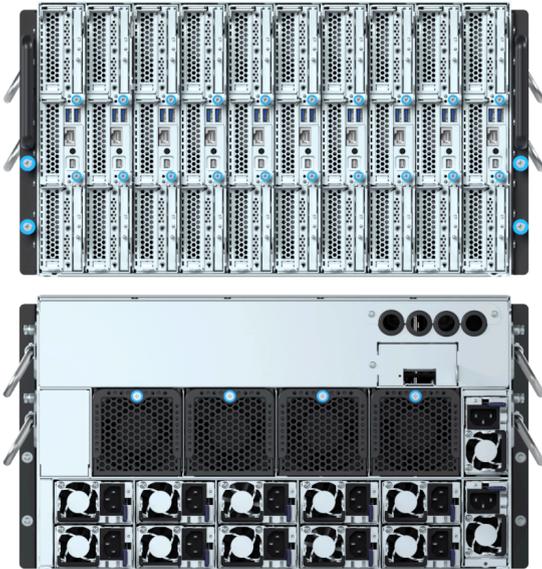

Key Features

- Integrated-manifold full-system DLC with up to 92% heat capture ratio
- 6U 10-node front access server system
- [DLC] Dual Intel® Xeon® 6900-Series Processors per node
- [DLC] 12-Channel DDR5 RDIMM / MRDIMM, 24 x DIMMs per node
- [DLC] 2 x E3.S Gen5 NVMe bays per node
- [DLC] 3 x LP PCIe Gen5 x16 slots per node
- 6+6 3200W 80 PLUS Titanium redundant power supplies

Applications

High-Performance Computing Server, Networks Server, Servers for Hybrid/Private Cloud...

Specification

Dimensions	6U 10-Node - Front access (W447 x H262.3 x D900 mm)	PCIe Expansion Slots	[DLC] 3 x LP PCIe Gen5 x16 per node
Motherboard	MA84-HD3	I/O Ports	Front (per node): 2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x MLAN Rear: 2 x CMC ports, 1 x CMC status LED
CPU	Intel® Xeon® 6 Processors - Intel® Xeon® 6900-Series Processors [DLC] Dual processor per node, TDP up to 500W	TPM	1 x TPM header (SPI) per node, Optional TPM2.0 kit: CTM012
Socket	20 x LGA 7529	Power Supply	6+6 3200W 80 PLUS Titanium redundant power supplies AC Input: 100-240V *The system power supply requires C19 power cord.
Chipset	System on Chip	System Fans	4 x 80x80x80mm
Memory	[DLC] 12-Channel DDR5 RDIMM/MRDIMM, 24 x DIMMs per node [RDIMM] Up to 6400 MT/s [MRDIMM] Up to 8800 MT/s [1] [1] MRDIMMs are supported only on select Intel® Xeon® 6 processors with P-cores.	Operating Properties	Operating: 10°C to 35°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing) *To ensure system stability and prevent condensation, when the relative humidity exceeds 50%, the coolant inlet temperature must be higher than the dry-bulb temperature and it should not exceed 45°C.
LAN	Front: 1 x 10/100/1000 Mbps Management LAN per node Rear: 2 x Chassis Management LAN	Packaging Content	1 x B684-A80-LAS1 10 x Cold plates 1 x Mini-DP to D-Sub cable 20 x Carriers 1 x L-shape Rail kit
Video	Integrated in ASPEED® AST2600 - 1 x Mini-DP per node	Ordering Part Numbers	6NB684A80DR000LAS1*
Storage	Front: [DLC] 2 x E3.S Gen5 NVMe per node		



Learn more at: <https://www.gigabyte.com/Enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.

* All trademarks and logos are the properties of their respective holders.

© 2026 Giga Computing Technology Co., Ltd. All rights reserved.

Last updated: Feb 26, 2026

Designed by

