


# E243-E30-AAV1

Edge Server - AMD EPYC™ 8005/8004 Server Processors - 2U UP 2 x PCIe Gen5 GPUs Titanium PSU

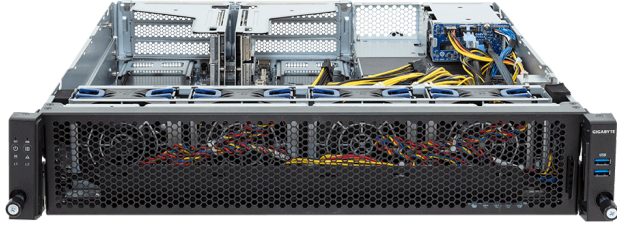

## Key Features

- Supports up to 2 x dual-slot Gen5 GPUs
- Single AMD EPYC™ 8005/8004 Server Processors
- 6-Channel DDR5 RDIMM per CPU with 12 x DIMMs
- 1 x 1 Gb/s LAN port via Intel® I210-AT
- 2 x 2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 1 x M.2 slot with PCIe Gen3 x4
- 2 x FHFL PCIe x16 slots with Gen5 x16 lanes for GPU
- 2 x OCP NIC 3.0 PCIe Gen5 x16 slots
- 1+1 1600 W 80 PLUS Titanium redundant power supplies

## Applications

AI Platform, AI Training Server, AI Inference Server, Visual Computing, Servers for Hybrid/Private Cloud, Edge Server...

## Specification

<b>Dimensions</b>	2U (W438 x H87.5 x D520 mm)	<b>I/O Ports</b>	<b>Front:</b> 2 x USB 3.2 Gen1 <b>Rear:</b> 2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x RJ45, 1 x MLAN
<b>Motherboard</b>	ME33-DC0	<b>Backplane Board</b>	PCIe Gen5 x4 or SATA 6 Gb/s or SAS-4 24 Gb/s
<b>CPU</b>	AMD EPYC™ 8005 Server Processors AMD EPYC™ 8004 Server Processors Single processor, cTDP up to 225 W	<b>TPM</b>	1 x TPM header (SPI), Optional TPM 2.0 kit: CTM010
<b>OS Compatibility</b>	<a href="#">OS Support List</a>	<b>Power Supply</b>	1+1 1600 W 80 PLUS Titanium redundant power supplies AC Input: 100-240 V
<b>Socket</b>	1 x LGA 4844	<b>System Management</b>	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
<b>Chipset</b>	System on Chip	<b>System Fans</b>	4 x 80x80x38mm
<b>Memory</b>	6-Channel DDR5 RDIMM, 12 x DIMMs [EPYC 8005] Up to 6400 MT/s (1DPC), 5200 MT/s (2DPC) [EPYC 8004] Up to 4800 MT/s (1DPC), 3600 MT/s (2DPC)	<b>Operating Properties</b>	Operating: 10°C to 35°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)
<b>LAN</b>	1 x 1 Gb/s LAN (1 x Intel® I210-AT), Supports NCSI 1 x 10/100/1000 Mb/s Management LAN	<b>Packaging Content</b>	1 x E243-E30-AAV1 1 x CPU heatsink 1 x Mini-DP to D-Sub cable 1 x GPU power cable (16-pin, 360mm) 1 x GPU power cable (16-pin, 490mm)
<b>Video</b>	Integrated in ASPEED® AST2600 - 1 x Mini-DP	<b>Ordering Part Numbers</b>	6NE243E30DR000AAV1*
<b>Storage</b>	<b>Rear hot-swap:</b> 2 x 2.5" Gen5 NVMe/SATA/SAS-4 <sup>[1]</sup> <b>Internal M.2:</b> 1 x M.2 (2280/22110), PCIe Gen3 x4  <sup>[1]</sup> SAS card is required to support SAS drives.	<b>Optional Parts</b>	- 2-Section Rail kit (385-480mm): 25HB2-3A0204-K0R (MOQ: 500) - 2-Section Rail kit (660-840mm): 25HB2-3A0203-K0R
<b>RAID</b>	Require RAID add-in cards		
<b>PCIe Expansion Slots</b>	2 x FHFL x16 (Gen5 x16), for GPUs 2 x OCP NIC 3.0 (Gen5 x16), Support NCSI		



Learn more at: <https://www.gigabyte.com/Enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.

\* All trademarks and logos are the properties of their respective holders.

© 2026 Giga Computing Technology Co., Ltd. All rights reserved.

Last updated: May 20, 2026

Designed by

