


G893-ZX1-AAX3

HPC/AI Server - AMD EPYC™ 9005/9004 Server Processors -
8U DP AMD Instinct™ MI350X

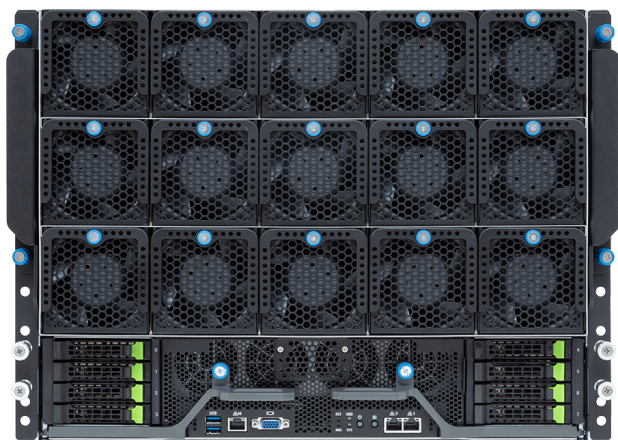

Key Features

- 8 x AMD Instinct™ MI350X OAM GPUs
- Dual AMD EPYC™ 9005/9004 Server Processors
- 12-Channel DDR5 RDIMM per CPU with 24 x DIMMs
- Compatible with AMD Pensando™ Pollara 400 AI NIC
- 2 x 10 Gb/s LAN ports via Intel® X710-AT2
- 2 x M.2 slots with PCIe Gen3 x4 and x1
- 8 x 2.5" Gen5 NVMe hot-swap bays
- 4 x FHHL dual-slot PCIe x16 slots with Gen5 x16 lanes
- 8 x FHHL single-slot PCIe x16 slots with Gen5 x16 lanes
- 6+6 3000 W 80 PLUS Titanium redundant power supplies

Applications

AI Platform, AI Training Server, AI Inference Server, High-Performance Computing Server...

Specification

| | | | |
|-------------------------|--|------------------------------|--|
| Dimensions | 8U (W447 x H351 x D923 mm) | Modular GPU | 8 x AMD Instinct™ MI350X OAM GPUs |
| Motherboard | MZB3-PE0 | PCIe Expansion Slots | 4 x FHHL x16 (Gen5 x16), dual-slot 8 x FHHL x16 (Gen5 x16), single-slot |
| CPU | AMD EPYC™ 9005 Server Processors AMD EPYC™ 9004 Server Processors Dual processor, cTDP up to 500 W | I/O Ports | Front: 2 x USB 3.2 Gen1, 1 x VGA, 2 x RJ45, 1 x MLAN (default) Rear: 1 x MLAN |
| OS Compatibility | OS Support List | TPM | 1 x TPM header (SPI), Optional TPM 2.0 kit: CTM012 |
| Socket | 2 x LGA 6096 (Socket SP5) | Power Supply | 6+6 3000 W 80 PLUS Titanium redundant power supplies AC Input: 115-240 V *The system power supply requires C19 power cord. |
| Chipset | System on Chip | System Fans | Motherboard: 2 x 60x60x56mm 4 x 60x60x76mm PCIe slots: 4 x 80x80x56mm GPU tray: 15 x 80x80x80mm |
| Memory | 12-Channel DDR5 RDIMM, 24 x DIMMs [EPYC 9005] Up to 6400 MT/s [EPYC 9004] Up to 4800 MT/s | Operating Properties | Operating: 10°C to 30°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing) |
| LAN | Front: 2 x 10 Gb/s LAN (1 x Intel® X710-AT2), Support NCSI 1 x 10/100/1000 Mb/s Management LAN Rear: 1 x 10/100/1000 Mb/s Management LAN | Packaging Content | 1 x G893-ZX1-AAX3 2 x CPU heatsinks 1 x L-shape Rail kit |
| Video | Integrated in ASPEED® AST2600 - 1 x VGA port | Ordering Part Numbers | 6NG893ZX1DR000ACX3* |
| Storage | Front hot-swap: 8 x 2.5" Gen5 NVMe Internal M.2: 1 x M.2 (2280/22110), PCIe Gen3 x4 1 x M.2 (2280/22110), PCIe Gen3 x1 | | |



Learn more at: <https://www.gigabyte.com/Enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.

* All trademarks and logos are the properties of their respective holders.

© 2026 Giga Computing Technology Co., Ltd. All rights reserved.

Last updated: May 18, 2026

Designed by

