


G894-ZD3-AAX7

HPC/AI Server - AMD EPYC™ 9005/9004 - 8U DP NVIDIA HGX™ B300

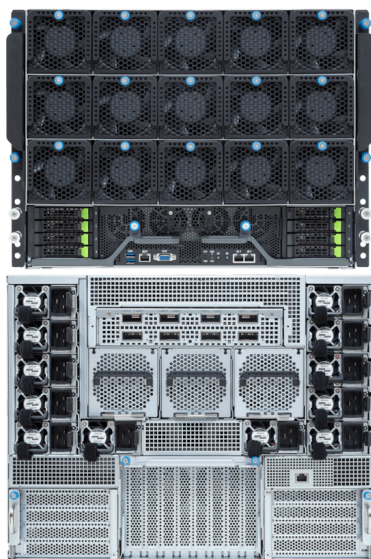

Key Features

- NVIDIA HGX™ B300
- 8 x 800 Gb/s OSFP GPU networking ports supporting InfiniBand XDR or dual 400 Gb/s Ethernet via onboard NVIDIA ConnectX®-8 SuperNIC™
- 1.8 TB/s GPU-to-GPU bandwidth with NVIDIA NVLink™
- Dual AMD EPYC™ 9005/9004 Series Processors
- 12-Channel DDR5 RDIMM, 24 x DIMMs
- Compatible with NVIDIA® BlueField® -3 DPUs
- 2 x 10 Gb/s LAN ports via Intel® X710-AT2
- 2 x M.2 PCIe Gen3 x4 and x1
- 8 x 2.5" Gen5 NVMe hot-swap bays
- 4 x FHHL PCIe Gen5 x16
- 12 x 3000 W 80 PLUS Titanium redundant power supplies

Applications

AI Platform, AI Training Server, AI Inference Server, High-Performance Computing Server...

Specification

Dimensions	8U (W447 x H351 x D923 mm)	Modular GPU	NVIDIA HGX™ B300 with 8 x SXM GPUs
Motherboard	MZB3-PE2	PCIe Expansion Slots	4 x FHHL PCIe Gen5 x16
CPU	AMD EPYC™ 9005 Series Processors AMD EPYC™ 9004 Series Processors Dual processor, cTDP up to 500 W	I/O Ports	Front: 2 x USB 3.2 Gen1, 1 x VGA, 2 x RJ45, 1 x MLAN (default) Rear: 1 x MLAN
OS Compatibility	OS Support List	TPM	1 x TPM header (SPI), Optional TPM 2.0 kit: CTM012
Socket	2 x LGA 6096 (Socket SP5)	Power Supply	12 x 3000 W 80 PLUS Titanium redundant power supplies AC Input: 115-240 V *The system power supply requires C19 power cord.
Chipset	System on Chip	System Fans	Motherboard: 2 x 60x60x56mm 4 x 60x60x76mm OSFP ports: 4 x 40x40x56mm PCIe slots: 2 x 80x80x56mm GPU tray: 15 x 80x80x80mm
Memory	12-Channel DDR5 RDIMM, 24 x DIMMs [EPYC 9005] Up to 6400 MT/s [EPYC 9004] Up to 4800 MT/s	Operating Properties	Operating: 10°C to 30°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)
LAN	Front: 2 x 10 Gb/s LAN (1 x Intel® X710-AT2), Support NCSI 1 x 10/100/1000 Mb/s Management LAN Rear: 8 x 800 Gb/s OSFP supporting InfiniBand XDR or dual 400 Gb/s Ethernet, for GPU networking 1 x 10/100/1000 Mb/s Management LAN	Packaging Content	1 x G894-ZD3-AAX7 2 x CPU heatsinks 1 x L-shape Rail kit
Video	Integrated in ASPEED® AST2600 - 1 x VGA port	Ordering Part Numbers	6NG894ZD3DR000ACX7*
Storage	Front hot-swap: 8 x 2.5" Gen5 NVMe Internal M.2: 1 x M.2 (2280/22110), PCIe Gen3 x4 1 x M.2 (2280/22110), PCIe Gen3 x1		



Learn more at: <https://www.gigabyte.com/Enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.

* All trademarks and logos are the properties of their respective holders.

© 2026 Giga Computing Technology Co., Ltd. All rights reserved.

Last updated: Apr 21, 2026

Designed by

