


# ME03-CE1 (Rev. 1.x)

Motherboard - AMD EPYC™ 8005/8004 Server Processors - ATX UP 1 Gb/s LAN

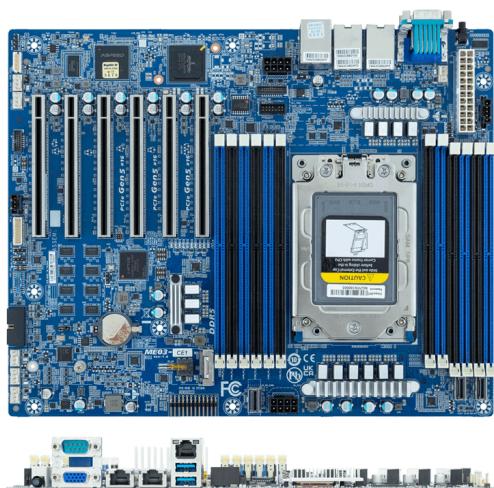

## Key Features

- Single AMD EPYC™ 8005/8004 Server Processors
- 6-Channel DDR5 RDIMM per CPU with 12 x DIMMs
- 2 x 1 Gb/s LAN ports via Broadcom® BCM5720
- 3 x MCI0 4i connectors supporting PCIe Gen5 x4 or SATA
- 1 x M.2 slot with PCIe Gen3 x4
- 3 x PCIe x16 slots with Gen5 x16 lanes
- 3 x PCIe x16 slots with Gen4 x16 and x8 lanes

## Specification

<b>Form Factor</b>	ATX (W304.8 x D243.8 mm)	<b>Internal I/O</b>	1 x 24-pin ATX main power connector 2 x 8-pin ATX 12V power connectors 1 x CPU fan header / 5 x System fan headers 1 x USB 3.2 Gen1 header / 1 x M.2 slot 3 x MCI0 4i connectors / 1 x Front panel header 1 x Backplane board header / 1 x PMBus connector 1 x IPMB connector / 1 x TPM header
<b>CPU</b>	AMD EPYC™ 8005 Server Processors AMD EPYC™ 8004 Server Processors Single processor, cTDP up to 225 W	<b>Rear I/O</b>	2 x USB 3.2 Gen1 ports (Type-A) 1 x VGA port 1 x Serial port 2 x RJ45 ports 1 x MLAN port 1 x ID button with LED
<b>Socket</b>	1 x LGA 4844 (Socket SP6)	<b>Security Modules</b>	1 x TPM header (SPI), Optional TPM 2.0 kit: CTM010
<b>Chipset</b>	System on Chip	<b>Board Management</b>	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
<b>Memory</b>	6-Channel DDR5 RDIMM, 12 x DIMMs [EPYC 8005] Up to 6400 MT/s (1DPC), 5200 MT/s (2DPC) [EPYC 8004] Up to 4800 MT/s (1DPC), 3600 MT/s (2DPC)	<b>PSU Connectors</b>	1 x 24-pin ATX main power connector 2 x 8-pin ATX 12V power connectors
<b>OS Compatibility</b>	<a href="#">OS Support List</a>	<b>Operating Properties</b>	Operating: 10°C to 40°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)
<b>LAN</b>	2 x 1 Gb/s LAN (1 x Broadcom® BCM5720), Support NCSI 1 x 10/100/1000 Mb/s Management LAN	<b>Retail Packaging Content</b>	1 x ME03-CE1 1 x I/O shield 1 x Quick start guide 1 x MCI0 4i to 4 x SATA cable  Quantity: 10 x single boxes in one carton
<b>Video</b>	Integrated in ASPEED® AST2600 - 1 x VGA port	<b>Bulk Packaging Content</b>	10 x ME03-CE1 10 x I/O shields
<b>Audio</b>	N/A	<b>Ordering Part Numbers</b>	Retail: 9ME03CE1MR-000-1* Bulk: 9ME03CE1NR-000-1*
<b>Storage Interface</b>	<b>MCI0:</b> 3 x MCI0 4i for 3 x Gen5 NVMe or 12 x SATA <b>M.2:</b> 1 x M.2 (2280/22110), PCIe Gen3 x4		
<b>RAID</b>	N/A		
<b>PCIe Expansion Slots</b>	Slot_6: PCIe x16 (Gen5 x16) Slot_5: PCIe x16 (Gen5 x16) Slot_4: PCIe x16 (Gen5 x16) Slot_3: PCIe x16 (Gen4 x16) Slot_2: PCIe x16 (Gen4 x0 or x8), <b>shared with Slot_1</b> Slot_1: PCIe x16 (Gen4 x16 or x8), <b>shared with Slot_2</b>  3 x MCI0 4i (Gen5 x4 or SATA)		



Learn more at: <https://www.gigabyte.com/Enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.

\* All trademarks and logos are the properties of their respective holders.

© 2026 Giga Computing Technology Co., Ltd. All rights reserved.

Last updated: May 20, 2026

Designed by

