

# GP-ASACNE6800TTTDA/ GC-4XM2G4


## User's Manual

12WE6-4XM2G4-10AR



To reduce the impacts on global warming, the packaging materials of this product are recyclable and reusable. GIGABYTE works with you to protect the environment.

**Before Installing or Setting up • 安裝或設定前 • 安裝或設置前**  
**インストールまたはセットアップする前に • 설치 또는 설정하기 전에**

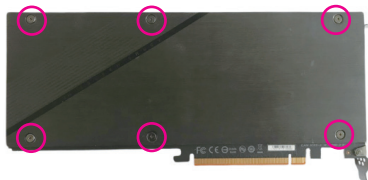


請用螺絲起子卸下位於轉接卡背面的六個螺絲，再將外殼移除。  
 請用螺絲起子卸下位於擴展卡背面的六個螺絲，再將外殼移除。  
 드라이버를 사용하여 어댑터 카드의背面에서 6개의 나사를 풀고 후면판을 제거하십시오.

Unfasten the six screws from the back of the adapter card with a screwdriver and then remove the backplate.

나사 드라이버로 어댑터 카드 뒷면에서 6 개의 나사를 풀고 후면판을 제거하십시오.

**Connectors • 插座介紹 • 接口介紹 • 콘넥터 • 커넥터**

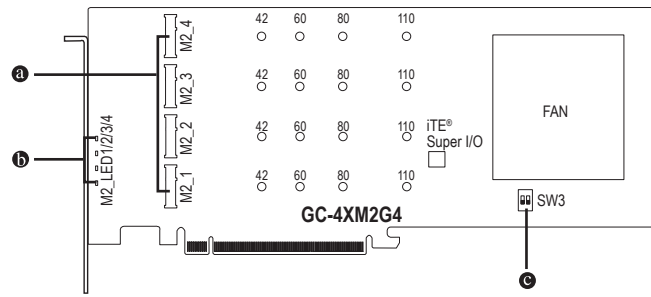

㉑ **M2\_1/M2\_2/M2\_3/M2\_4 (M.2 Socket 3 Connectors/M.2 Socket 3插座)**

You can install M.2 PCIe SSDs in the connectors.

您可以安裝M.2 PCIe SSD至這些插座。

您可以安裝M.2 PCI-E SSD至這些插槽。

コネクタに M.2 PCIe SSD をインストールできます。

커넥터에 M.2 PCIe SSD를 설치할 수 있습니다.

㉒ **M2\_LED1/23/4 (M.2 Activity Indicator LEDs/M.2 動作指示燈)**

The LED blinks when your M.2 PCIe SSD is being accessed.

當M.2 PCIe SSD有存取動作時指示燈即會亮起。

當M.2 PCI-E SSD有讀寫動作時指示燈就會亮起。

M.2 PCIe SSD にアクセスしているときに LED が点滅します。

M.2 PCIe SSD에 액세스하면 LED가 깜박입니다.

㉓ **SW3**

If you want to install more than one adapter card, make sure to follow the table below to set the address priority for each card.

若您安裝兩張以上的轉接卡，請依照下表設定轉接卡的位址順序。

若您安裝兩張以上的擴展卡，請依照下表設置擴展卡的位置順序。

複数のアダプタカードをインストールする場合は、以下の表に従って、各カードのアドレス優先度を設定してください。

두 개 이상의 어댑터 카드를 설치하려면 아래 표를 따라 각 카드의 주소 우선순위를 설정하십시오.



	1	2
First Card/第一張卡	ON	ON
Second Card/第二張卡	ON	OFF
Third Card/第三張卡	OFF	ON

## Product Specifications

Interface	<ul style="list-style-type: none"><li>◆ PCI Express x16, compatible with PCI Express x16 and x8 slots (If the adapter card is installed in a x8 slot, only the M2_1 and M2_2 connectors can be used.)</li></ul>
LED	<ul style="list-style-type: none"><li>◆ 4 x M.2 activity LEDs</li></ul>
Storage Interface	<ul style="list-style-type: none"><li>◆ 4 x M.2 connectors (Socket 3, M key, type 2242/2260/2280/22110 PCIe x4 SSD support)</li><li>◆ Support for RAID 0, RAID 1, and RAID 10 <sup>(Note 1)</sup></li></ul>
M.2 Storage	<ul style="list-style-type: none"><li>◆ 4 x M.2 2TB Gen4 SSDs <sup>(Note 2)</sup></li></ul>
Dimension	<ul style="list-style-type: none"><li>◆ 26.2cm x 11.5cm</li></ul>

(Note 1) Supported RAID levels vary by platform.

(Note 2) Included only with the GP-ASACNE6800TTTDA model.

## 產品規格

介面	<ul style="list-style-type: none"><li>◆ PCI Express x16插槽，支援x16或x8運作規格(如安裝在x8運作規格的插槽，僅支援M2_1/M2_2插座)</li></ul>
LED	<ul style="list-style-type: none"><li>◆ 4 個 M.2 動作指示燈</li></ul>
儲存設備介面	<ul style="list-style-type: none"><li>◆ 4個M.2插座(支援Socket 3，M key，type 2242/2260/2280/22110 PCIe x4 SSD)</li><li>◆ 支援RAID 0、RAID 1及RAID 10功能<sup>(註一)</sup></li></ul>
M.2 儲存設備	<ul style="list-style-type: none"><li>◆ 4個M.2 2TB Gen4 SSD <sup>(註二)</sup></li></ul>
尺寸	<ul style="list-style-type: none"><li>◆ 26.2cm x 11.5cm</li></ul>

(註一) 支援RAID的模式，可能依使用平台而不同。

(註二) 只有GP-ASACNE6800TTTDA提供此設備。

## 产品规格

接口	<ul style="list-style-type: none"><li>◆ PCI-E x16插槽, 支持x16或x8运行规则 (如安装在x8运行规格的插槽, 仅支持M2_1/M2_2插槽)</li></ul>
LED	<ul style="list-style-type: none"><li>◆ 4个M.2动作指示灯</li></ul>
存储设备接口	<ul style="list-style-type: none"><li>◆ 4个M.2插槽(支持Socket 3, Mkey, type 2242/2260/2280/22110 PCIe x4 SSD)</li><li>◆ 支持RAID 0、RAID 1及RAID 10功能<sup>(注一)</sup></li></ul>
M.2 存储设备	<ul style="list-style-type: none"><li>◆ 4个M.2 2TB Gen4 SSD<sup>(注二)</sup></li></ul>
尺寸	<ul style="list-style-type: none"><li>◆ 26.2cm x 11.5cm</li></ul>

(注一) 支持RAID的模式, 可能依使用平台而不同。

(注二) 只有GP-ASACNE6800TTTDA提供此设备。

## 製品の仕様

インターフェイス	<ul style="list-style-type: none"><li>◆ PCI Express x16、PCI Express x16 および x8 スロットと互換性があります (アダプタカードが x8 スロットに取り付けられている場合、M2_1 および M2_2 コネクタのみを使用できます。)</li></ul>
LED	<ul style="list-style-type: none"><li>◆ 4 x M.2 アクセス LED</li></ul>
ストレージインターフェイス	<ul style="list-style-type: none"><li>◆ 4xM.2コネクタ(ソケット3、Mキー、タイプ2242/2260/2280/22110 PCIe x4 SSD 対応)</li><li>◆ RAID 0、RAID 1、および RAID 10 対応<sup>(注1)</sup></li></ul>
M.2 ストレージ	<ul style="list-style-type: none"><li>◆ 4 x M.2 2TB Gen4 SSD<sup>(注2)</sup></li></ul>
サイズ	<ul style="list-style-type: none"><li>◆ 26.2cm x 11.5cm</li></ul>

(注1) 対応する RAID レベルはプラットフォームによって異なります。

(注2) GP-ASACNE6800TTTDA モデルにのみ含まれています。


## 제품 사양

인터페이스	♦ PCI Express x16 및 x8 슬롯과 호환되는 PCI Express x16 인터페이스(Adpater 카드가 x8 슬롯에 설치된 경우 M2_1 및 M2_2 커넥터 만 사용할 수 있습니다.)
LED	♦ M.2 작동 LED 4 개
저장 장치 인터페이스	♦ 4 개의 M.2 커넥터 (소켓 3, M 키, 2242/2260/2280/22110 유형 PCIe x4 SSD 지원) ♦ RAID 0, RAID 1 및 RAID 10 지원 (주 1)
M.2 저장 장치	♦ M.2 2TB Gen4 SSD 4 개 (주 2)
치수	♦ 26.2cm x 11.5cm

(주 1) 지원되는 RAID 레벨은 플랫폼에 따라 다릅니다.

(주 2) GP-ASACNE6800TTTDA 모델에만 포함됩니다.

## Installing an M.2 SSD (Note) • 安裝 M.2 SSD (註) • 安裝 M.2 SSD (註) • M.2 SSD 의インストール (註) • M.2 SSD 설치 (주)



### Step 1:

Remove the M.2 protective films from the heatsink cover and adapter card as indicated.

### 步驟一：


請先撕除外殼及轉接卡上的M.2 導熱片保護膜。

### 步驟一：

請先撕除外殼及轉接卡上的M.2導熱墊保護膜。

### ステップ1:

示されているように、ヒートシンクカバーとアダプターカードから M.2 保護フィルムを取り外します。



### 1 단계:

표시된대로 방열판 덮개 및 어댑터 카드에서 M.2 보호 필름을 제거하십시오.


(Note) For the GC-4XM2G4 only.

(註) 只有GC-4XM2G4需要此步驟。

(註) 只有GC-4XM2G4需要此步驟。

(註) GC-4XM2G4のみ。

(주) GC-4XM2G4 만 해당됩니다.



**Step 2:**

Use a screw driver to unfasten the screw and standoff. Locate the proper mounting hole for the M.2 SSD to be installed and then screw the standoff first. Then slide it into the connector at an angle.

**步驟二：**

請用螺絲起子依序將螺絲和螺柱拆下，依實際要安裝的M.2 SSD規格找到適合螺絲孔位之後，先鎖上螺柱，再將M.2 SSD以斜角方式放入插座。

**步驟二：**

請用螺絲起子依序將螺絲和螺柱拆下，依實際要安裝的M.2 SSD規格找到適合螺絲孔位之後，先鎖上螺柱，再將M.2 SSD以斜角方式放入插槽。


**ステップ2:**

ドライバーを使用して、ネジとネジ受けを外します。取り付ける M.2 SSD の適切な取り付け穴を見つけ、最初にネジ受けをねじ込みます。次に、M.2 SSD を斜めにコネクタへ差し込みます。

**2 단계:**

나사 드라이버를 사용하여 나사와 스탠드 오프를 풉니다. M.2 SSD를 설치할 올바른 장착 구멍을 찾은 다음 먼저 스탠드 오프를 조입니다. 그런 다음 커넥터에 비스듬히 밀어 넣으십시오.





**Step 3:**  
Press the M.2 SSD down and then secure it with the screw.

步驟三：  
壓住M.2 SSD之後，再將螺絲鎖上。

步驟三：  
壓住M.2 SSD之后，再將螺絲鎖上。

ステップ3：  
M.2 SSD を押し下げてから、ネジで固定します。

3 단계:  
M.2 SSD를 아래로 누른 다음 나사로 고정하십시오.



## Contact Us

---

### **GIGA-BYTE TECHNOLOGY CO., LTD.**

Address: No.6, Baoqiang Rd., Xindian Dist., New Taipei City 231, Taiwan

TEL: +886-2-8912-4000, FAX: +886-2-8912-4005

Tech. and Non-Tech. Support (Sales/Marketing) : <https://esupport.gigabyte.com>

WEB address (English): <https://www.gigabyte.com>

WEB address (Chinese): <https://www.gigabyte.com/tw>

---

### **Copyright**

© 2019 GIGA-BYTE TECHNOLOGY CO., LTD. All rights reserved.

The trademarks mentioned in this manual are legally registered to their respective owners.

### **Disclaimer**

Information in this manual is protected by copyright laws and is the property of GIGABYTE.

Changes to the specifications and features in this manual may be made by GIGABYTE without prior notice.

No part of this manual may be reproduced, copied, translated, transmitted, or published in any form or by any means without GIGABYTE's prior written permission.

For product-related information, check on our website at:

<https://www.gigabyte.com>

**GIGABYTE™**

### Declaration of Conformity

We, Manufacturer/Importer,

G.J.T., Technology Trading GmbH

Address: **Bültenkoppel 16, 22047 Hamburg, Germany**

Declare that the product

Product Type: **AORUS Gen4 AIC SSD 8TB**

Product Name: **GP.ASACNE6800TTDA**

conforms with the essential requirements of the following directives:

**EMC Directive 2014/53/EU:**

- |  |                       |
|--|-----------------------|
| <input checked="" type="checkbox"/> Conduction & Radiated Emissions: | EN 55032:2012+AC:2013 |
| <input checked="" type="checkbox"/> Immunity:                        | EN 55024:2010+A1:2015 |
| <input checked="" type="checkbox"/> Power-line harmonics:            | EN 61000-3-2:2014     |
| <input checked="" type="checkbox"/> Power-line Flicker:              | EN 61000-3-3:2013     |

**Low Voltage Directive 2014/35/EU:**

- |   |  |
|---|--|
| <input checked="" type="checkbox"/> Safety: | EN60950-1:2006+A11:2009+A12:2011+A2:2013 |
|---|--|

**RoHS Directive 2011/65/EU**

- |   |   |
|---|---|
| <input checked="" type="checkbox"/> Restriction of use of certain substances in electronic equipment: | This product does not contain any of the restricted substances listed in Annex B, in concentrations and applications banned by the directive. |
|---|---|

**CE marking**



Signature: Timmy Huang

(date)

Date: Sept. 12, 2019

Name: Timmy Huang

### DECLARATION OF CONFORMITY

Per FCC Part 2 Section 2.1077(a)



Responsible Party Name: **G.B.T. INC. (U.S.A.)**

Address: **17358 Railroad Street  
City of Industry, CA 91748**

Phone/Fax No: **(626) 854-9338/ (626) 854-9326**

hereby declares that the product

**Product Name: AORUS Gen4 AIC SSD 8TB**

**Model Number: GP.ASACNE6800TTDA**

Conforms to the following specifications:

FCC Part 15, Subpart B, Section 15.107(a) and Section 15.109 (a), Class B Digital Device

**Supplementary Information:**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful and (2) this device must accept any interference received, including that may cause undesired operation.

Representative Person's Name: ERIC LU

Signature: Eric Lu

Date: Sept. 12, 2019

### Declaration of Conformity

We, Manufacturer/Importer,

G.J.L.T. Technology Trading GmbH

Address: **Bültenkoppel 16, 22047 Hamburg, Germany**

Declare that the product

Product Type: **AORUS Gen4 AIC Adaptor**

Product Name: **GC-4XM2G4**

conforms with the essential requirements of the following directives:

**EMC Directive 2014/53/EU:**

- |  |                       |
|--|-----------------------|
| <input checked="" type="checkbox"/> Conduction & Radiated Emissions: | EN 55032:2012+AC:2013 |
| <input checked="" type="checkbox"/> Immunity:                        | EN 55024:2010+A1:2015 |
| <input checked="" type="checkbox"/> Power-line harmonics:            | EN 61000-3-2:2014     |
| <input checked="" type="checkbox"/> Power-line Flicker:              | EN 61000-3-3:2013     |

**Low Voltage Directive 2014/35/EU:**

- |   |  |
|---|--|
| <input checked="" type="checkbox"/> Safety: | EN60950-1:2006+A11:2009+A12:2011+A2:2013 |
|---|--|

**RoHS Directive 2011/65/EU**

- |   |  |
|---|--|
| <input checked="" type="checkbox"/> Restriction of use of certain substances in electronic equipment: | This product does not contain any of the restricted substances listed in Annex II, in concentrations and applications banned by the directive. |
|---|--|

**CE marking**



Signature: Timmy Huang

(date)

Date: Sept. 12, 2019

Name: Timmy Huang

### DECLARATION OF CONFORMITY

Per FCC Part 2 Section 2.1077(a)



Responsible Party Name: **G.B.T. INC. (U.S.A.)**

Address: **17358 Railroad Street  
City of Industry, CA 91748**

Phone/Fax No: (626) 854-9338/ (626) 854-9326

hereby declares that the product

**Product Name: AORUS Gen4 AIC Adaptor**

**Model Number: GC-4XM2G4**

Conforms to the following specifications:

FCC Part 15, Subpart B, Section 15.107(a) and Section 15.109 (a), Class B Digital Device

**Supplementary Information:**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful and (2) this device must accept any interference received, including that which may cause undesired operation.

Representative Person's Name: ERIC LU

Signature: Eric Lu

Date: Sept. 12, 2019

## **Regulatory Statements**

### **Regulatory Notices**

This document must not be copied without our written permission, and the contents there of must not be imparted to a third party nor be used for any unauthorized purpose.

Contravention will be prosecuted. We believe that the information contained herein was accurate in all respects at the time of printing. GIGABYTE cannot, however, assume any responsibility for errors or omissions in this text. Also note that the information in this document is subject to change without notice and should not be construed as a commitment by GIGABYTE.

### **Our Commitment to Preserving the Environment**

In addition to high-efficiency performance, all GIGABYTE motherboards fulfill European Union regulations for RoHS (Restriction of Certain Hazardous Substances in Electrical and Electronic Equipment) and WEEE (Waste Electrical and Electronic Equipment) environmental directives, as well as most major worldwide safety requirements. To prevent releases of harmful substances into the environment and to maximize the use of our natural resources, GIGABYTE provides the following information on how you can responsibly recycle or reuse most of the materials in your "end of life" product.

### **Restriction of Hazardous Substances (RoHS) Directive Statement**

GIGABYTE products have not intended to add and safe from hazardous substances (Cd, Pb, Hg, Cr+6, PBDE and PBB). The parts and components have been carefully selected to meet RoHS requirement. Moreover, we at GIGABYTE are continuing our efforts to develop products that do not use internationally banned toxic chemicals.

### **Waste Electrical & Electronic Equipment (WEEE) Directive Statement**

GIGABYTE will fulfill the national laws as interpreted from the 2012/19/EU WEEE (Waste Electrical and Electronic Equipment) directive. The WEEE Directive specifies the treatment, collection, recycling and disposal of electric and electronic devices and their components. Under the Directive, used equipment must be marked, collected separately, and disposed of properly.

### **WEEE Symbol Statement**



The symbol shown below is on the product or on its packaging, which indicates that this product must not be disposed of with other waste. Instead, the device should be taken to the waste collection centers for activation of the treatment, collection, recycling and disposal procedure. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local government office, your household waste disposal service or where you purchased the product for details of environmentally safe recycling.

- ◆ When your electrical or electronic equipment is no longer useful to you, "take it back" to your local or regional waste collection administration for recycling.
- ◆ If you need further assistance in recycling, reusing in your "end of life" product, you may contact us at the Customer Care number listed in your product's user's manual and we will be glad to help you with your effort.

Finally, we suggest that you practice other environmentally friendly actions by understanding and using the energy-saving features of this product (where applicable), recycling the inner and outer packaging (including shipping containers) this product was delivered in, and by disposing of or recycling used batteries properly. With your help, we can reduce the amount of natural resources needed to produce electrical and electronic equipment, minimize the use of landfills for the disposal of "end of life" products, and generally improve our quality of life by ensuring that potentially hazardous substances are not released into the environment and are disposed of properly.

### **Battery Information**

European Union—Disposal and recycling information  
GIGABYTE Recycling Program (available in some regions)



This symbol indicates that this product and/or battery should not be disposed of with household waste. You must use the public collection system to return, recycle, or treat them in compliance with the local regulations.

## GIGABYTE Solid State Drive (SSD) - Limited Warranty

Thank you for purchasing a GIGABYTE Solid State Drive(SSD). Before using this product, please read and review the Limited Warranty thoroughly. Your use of this product indicates that you have accepted and agreed to the terms and conditions of this Limited Warranty statement.

GIGABYTE warrants to the original purchasers of this Product that this Product (excluding content and/or software, if applicable, supplied with or within the Product) will be free from material defects in manufacture, conform to GIGABYTE 's published product specifications, and be fit for normal use during the applicable "Warranty Period" specified below.

- ❖ The "Warranty Period" referred to above is: certain years from the date of delivery of the Product, provided the Product conforms to and is used in accordance with GIGABYTE's applicable product data sheet and product endurance specification. Warranty period may vary by countries, please visit GIGABYTE website for more detail information or contact with local RMA service center.
- ❖ Warranty coverage requires proof of purchase documentation with evidence of the date of purchase (sales receipt or invoice) and original packaging.
- ❖ Should GIGABYTE, under its discretion, deem that the product suffers from material defects in manufacture, GIGABYTE's sole obligation under this warranty is to replace or repair for free of charge, the defective product or all of the product's defective parts.
- ❖ If this Warranty covers a returned Product, the returned Product may be repaired or an equivalent product to the Product may be made available by the Reseller to the original purchaser. The previous sentence describes the sole and exclusive remedy available in the event this Warranty covers a returned Product.
- ❖ These warranties are valid only for the original owner of the product. GIGABYTE will not extend their warranty to items that are purchased secondhand. This warranty is not assignable; products purchased from secondhand sources are not covered in the warranty by GIGABYTE. This is still true even if the product or packaging appears sealed, advertised as new, or never used in any way. GIGABYTE only offers warranties for items sold by authorized retailers, system builders, and distributors.
- ❖ This Warranty does not cover any damage to this Product which results from accident, abuse, misuse, natural or personal disaster, or any unauthorized disassembly, repair or modification.
- ❖ A Product will be considered to have a material defect or to be materially defective only if such Product does not meet the stated design lifetime (up to the applicable Warranty Period), is returned to the appropriate location within the Warranty Period, and is subject to applicable performance threshold information contained in the Product's GIGABYTE data sheet.
- ❖ The original purchaser must ensure to the extent possible that all data is removed from the Product, and if it is not the case that all data is or can be removed, the original purchaser shall indemnify, defend and hold harmless GIGABYTE and the Reseller for any possible liabilities associated with the potential presence in the returned Product of sensitive and/or personal data, regardless of whether this data relates to the original purchaser or any other third party.
- ❖ It is possible for a drive to be used under conditions which cause the media to wear out (and the Warranty to expire) prior to the expiration of the stated time period in the Warranty, as specified in the applicable endurance specification linked below.
- ❖ Please check for more details on the GIGABYTE Website.  
<https://www.gigabyte.com/>

- ❖ GIGABYTE shall not be liable for (a) any incidental, indirect, special, exemplary, punitive or consequential damages, including but not limited to loss of profits and/or loss of data, other loss, damage or expense directly or indirectly arising from any defect or inability to use the Product or poor performance, either separately or in combination with other equipment, regardless of whether GIGABYTE or the original purchaser has been advised of the possibility of such damages, nor (b) any amounts in the aggregate in excess of the purchase price paid for the applicable Product(s). GIGABYTE is not liable for and does not cover under warranty, any costs associated with servicing and/or the installation of GIGABYTE products, including the Product.
- ❖ This Warranty sets forth the entire liability and obligations of GIGABYTE with respect to defects, breach of warranty or any other failure to perform or meet specification associated with any Products.
- ❖ GIGABYTE Warranty Guidelines GIGABYTE products, including the Product, must not be used in applications where failure could threaten injury or life, such as aviation, automotive, nuclear, medical or life support systems (or any other form of ultra-hazardous applications), and under no circumstances shall GIGABYTE offer any warranty or have any obligations arising from any such Product uses.
- ❖ Buyer acknowledges that the goods sold by GIGABYTE are being used or incorporated into other products or systems, and the ultimate safety of those products or systems are the sole responsibility of Buyer.
- ❖ This warranty applies only on the condition that the product has been installed, maintained and operated under conditions of normal use and in accordance with the installation guide provided herewith.
- ❖ The provisions of this warranty shall not apply if, in GIGABYTE's sole judgment, the product has been subject to misuse or neglect, improper installation, damaged in an accident, or repaired or altered in any way that affects its performance or reliability.
- ❖ Buyer assumes all risks and liabilities for use of GIGABYTE products in other products or systems. In addition, GIGABYTE is not responsible for any archival, backup or disaster recovery services.

#### Disclaimer

THIS WARRANTY IS IN LIEU OF ANY OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, TITLE, OR NON INFRINGEMENT, WHICH OTHER WARRANTIES ARE EXPRESSLY EXCLUDED AND DISCLAIMED. GIGABYTE SHALL NOT BE LIABLE FOR LOSS OF PROFITS OR ANY SPECIAL, INCIDENTAL, EXEMPLARY, CONSEQUENTIAL OR PUNITIVE DAMAGES WHICH PURCHASER OR THIRD PARTY MAY SUSTAIN, EVEN IF GIGABYTE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH LOSSES OR DAMAGES. IN NO EVENT SHALL GIGABYTE'S LIABILITY EXCEED THE PURCHASE PRICE OF THE DEFECTIVE PRODUCT. WITHOUT LIMITING THE GENERALITY OF THE PRECEDING PARAGRAPH, GIGABYTE EXPRESSLY DISCLAIMS ANY AND ALL LIABILITY FOR DIRECT, INDIRECT AND/OR CONSEQUENTIAL DAMAGES, INCLUDING LOST PROFITS, ARISING FROM THE LOSS, CORRUPTION, ERASURE OR DESTRUCTION OF ANY DATA STORED ON OR TRANSMITTED VIA ANY GIGABYTE PRODUCT, INCLUDING, WITHOUT LIMITATION, THE INABILITY TO ACCESS DATA STORED ON ANY SECURE GIGABYTE PRODUCTS THAT REQUIRE A USER-DESIGNATED PASSWORD OR CODE IF THAT PASSWORD OR CODE IS LOST, FORGOTTEN, OR COMPROMISED. USERS HAVE THE OBLIGATION TO BACKUP ALL DATA AND PASSWORDS OR CODES.



## 中华人民共和国产品中有有害物质名称及含量标识格式

依照中华人民共和国的电器电子产品有害物质限制使用标识要求(China RoHS)提供以下的表格:



### 关于符合中国《电器电子产品有害物质限制使用管理办法》的声明 Administrative Measures for the Restricted Use of Hazardous Substances in Electrical and Electronic Products (China RoHS Declaration)

产品中有害物质的名称及含量  
Hazardous Substances Table

部件名称(Parts)	有害物质(Hazardous Substances)					
	铅(Pb)	汞(Hg)	镉(Cd)	六价铬 (Cr6+)	多溴联苯(PBB)	多溴二苯醚 (PBDE)
PCB板 PCB	○	○	○	○	○	○
结构件及风扇 Mechanical parts and Fan	×	○	○	○	○	○
芯片及其他主动零件 Chip and other Active components	×	○	○	○	○	○
连接器 Connectors	×	○	○	○	○	○
被动电子元件 Passive Components	×	○	○	○	○	○
线材 Cables	○	○	○	○	○	○
焊接金属 Soldering metal	○	○	○	○	○	○
油墨剂、胶水类、粘胶及其封装 Ink, Solder Paste, Label and other Consumable Materials	○	○	○	○	○	○

These tables are prepared in accordance with the provisions of SJ/T 11364  
本表格依据SJ/T 11364的规定编制。

○: The content of such hazardous substance in all homogeneous materials of such component is below the limit required by GB/T 26572.  
表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。

×: The content of such hazardous substance in a certain homogeneous material of such component is beyond the limit required by GB/T 26572.  
表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求

### BSMI CNS15663 限用物質含有情況標示聲明書

#### Declaration of the Presence Condition of the Restricted Substances Marking

設備名稱： Equipment name	型號 (型式)： Type designation (Type)					
	限用物質及其化學符號 Restricted substances and its chemical symbols					
單元Unit	鉛 Lead (Pb)	汞 Mercury (Hg)	鎘 Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr <sup>VI</sup> )	多溴聯苯 Polybrominated diphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
PCB板 PCB	○	○	○	○	○	○
結構件及風扇 Mechanical parts and Fan	—	○	○	○	○	○
晶片及其他主動零件 Chip and other Active components	—	○	○	○	○	○
連接器 Connectors	—	○	○	○	○	○
被動電子元件 Passive Components	—	○	○	○	○	○
焊線金屬 Soldering metal	○	○	○	○	○	○
助焊劑、散熱膏、標籤及其他耗材 Flux, Solder Paste, Label and other Consumable Materials	○	○	○	○	○	○
<p>備考1. "超出0.1 wt %" 及 "超出0.01 wt %" 係指限用物質之百分比含量超出百分比含量基準值。                      Note 1: "Exceeding 0.1 wt %" and "exceeding 0.01 wt %" indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.</p> <p>備考2. "○"係指該項限用物質之百分比含量未超出百分比含量基準值。                      Note 2: "○" indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.</p> <p>備考3. "—"係指該項限用物質為排除項目。                      Note 3: The "—" indicates that the restricted substance corresponds to the exemption.</p>						