


MU92-TU1 (Rev. 1.x/2.x)

Motherboard - 3rd Gen Intel® Xeon® Scalable / Intel® Xeon® W-3300 - E-ATX, UP

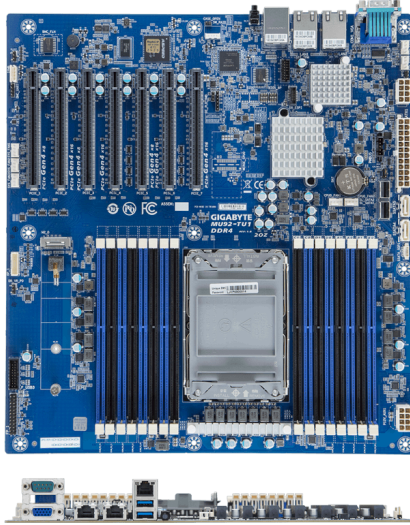

Key Features

- Single 3rd Gen Intel® Xeon® Scalable processors or Intel® Xeon® W-3300 processor
- 8-Channel DDR4 RDIMM/LRDIMM per CPU with 16 x DIMMs
- Supports Intel® Optane™ Persistent Memory 200 series
- Intel® C621A Chipset
- 2 x 10 Gb/s LAN ports via Intel® X710-AT2
- 2 x SATA 7-pin ports
- 2 x SlimSAS 4i connectors supporting SATA
- 1 x M.2 slot with PCIe Gen3 x4
- 7 x PCIe x16 slots with Gen4 x16 or x8 lanes

Specification

Form Factor	E-ATX (W305 x D330 mm)	Internal I/O	1 x 24-pin ATX main power connector 2 x 8-pin ATX 12V power connectors 2 x CPU fan headers / 5 x System fan headers 1 x USB 3.0 x2 header / 1 x M.2 slot 2 x SlimSAS 4i connectors / 2 x SATA 7-pin connectors 1 x VROC connector / 1 x Front panel header 1 x PMBus connector / 1 x IPMB connector 1 x TPM header
CPU	3rd Generation Intel® Xeon® Scalable processors Intel® Xeon® W-3300 processor Single processor, TDP up to 270 W	Rear I/O	2 x USB 3.0 ports (Type-A) 1 x VGA port 1 x Serial port 2 x RJ45 ports 1 x MLAN port 1 x ID button with LED
Socket	1 x LGA 4189 (Socket P+)	Security Modules	1 x TPM header (SPI), Optional TPM 2.0 kit: CTM010
Chipset	Intel® C621A	PSU Connectors	1 x 24-pin ATX main power connector 2 x 8-pin ATX 12V power connectors
Memory	8-channel DDR4 RDIMM/LRDIMM, 16 x DIMMs Up to 3200/2933/2666 MT/s	Operating Properties	Operating: 10°C to 40°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)
LAN	2 x 10 Gb/s LAN (1 x Intel® X710-AT2), Support NCSI 1 x 10/100/1000 Mb/s Management LAN	Retail Packaging Content	1 x MU92-TU1 1 x I/O shield 1 x Quick start guide 1 x SlimSAS 4i for 4 x SATA cable (600 mm) Quantity: 10 x single boxes in one carton
Video	Integrated in ASPEED® AST2600 - 1 x VGA port	Bulk Packaging Content	10 x MU92-TU1 10 x I/O shields
Audio	N/A	Ordering Part Numbers	Retail: 9MU92TU1MR-00-2*/1* Bulk: 9MU92TU1NR-00-2*/1*
Storage Interface	SlimSAS: 2 x SlimSAS 4i for 8 x SATA, from PCH SATA 7-pin: 2 x SATA, from PCH M.2: 1 x M.2 (2280/22110), PCIe Gen3 x4	Optional Parts	- CPU fansink: 25ST4-353203-M1R
RAID	Intel® SATA RAID 0/1/10/5 Onboard VROC key header		
PCIe Expansion Slots	Slot_7: PCIe x16 (Gen4 x16) Slot_6: PCIe x16 (Gen4 x16 or x8), shared with Slot_5 Slot_5: PCIe x16 (Gen4 x0 or x8), shared with Slot_6 Slot_4: PCIe x16 (Gen4 x16 or x8), shared with Slot_3 Slot_3: PCIe x16 (Gen4 x0 or x8), shared with Slot_4 Slot_2: PCIe x16 (Gen4 x16 or x8), shared with Slot_1 Slot_1: PCIe x16 (Gen4 x0 or x8), shared with Slot_2		



Learn more at: <https://www.gigabyte.com/Enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.

* All trademarks and logos are the properties of their respective holders.

© 2026 Giga Computing Technology Co., Ltd. All rights reserved.

Last updated: Sep 29, 2026

Designed by

