


W774-W90-AAF1

GPU Workstation - Intel® Xeon® 600 Processors for Workstations

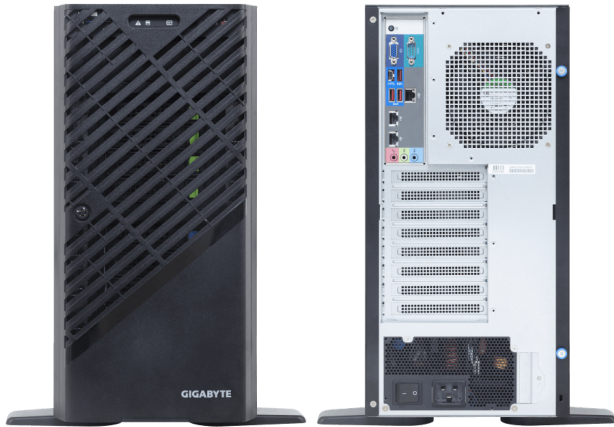

Key Features

- Supports up to 4 x dual-slot PCIe Gen5 GPUs
- Single Intel® Xeon® 600 Processors for Workstations
- 8-Channel DDR5 RDIMM/MRDIMM per CPU with 8 x DIMMs
- 2 x 10 Gb/s LAN ports via Intel® X710-AT2
- 4 x M.2 slots with PCIe Gen5 x4
- 4 x 3.5"/2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 4 x 3.5"/2.5" SATA/SAS-4 hot-swap bays
- 4 x PCIe x16 slots with Gen5 x16 lanes
- 2 x PCIe x16 slots with Gen5 x16 lanes, **require Intel® Xeon® 690/670/650 processors**
- Single 2500 W ATX 80 PLUS Platinum power supply

Specification

Dimensions	Pedestal (W218 x H455 x D726.3 mm)	PCIe Expansion Slots	Slot_7: PCIe x16 (Gen5 x16), from CPU Slot_6: PCIe x16 (Gen5 x16), from CPU ^[1] Slot_5: PCIe x16 (Gen5 x16), from CPU Slot_3: PCIe x16 (Gen5 x16), from CPU Slot_2: PCIe x16 (Gen5 x16), from CPU ^[1] Slot_1: PCIe x16 (Gen5 x16), from CPU
Motherboard	MW94-RP0		
CPU	Intel® Xeon® 600 processors for workstations Single processor, TDP up to 350 W *Please select Intel® Xeon® 690/670/650 processors to enable all functions.	I/O Ports	Front: 1 x USB 3.2 Gen2x2 (Type-C), 2 x USB 3.2 Gen1 (Type-A) Rear: 1 x USB 3.2 Gen2x2 (Type-C), 3 x USB 3.2 Gen2x1 (Type-A), 1 x VGA, 2 x RJ45, 1 x MLAN
OS Compatibility	OS Support List	TPM	1 x TPM header (SPI), Optional TPM 2.0 kit: CTM012
Socket	1 x LGA 4710-2 (Socket E2)	Power Supply	Single 2500 W ATX 80 PLUS Platinum power supply AC Input: 200-240 V *The system power supply requires C19 power cord.
Chipset	Intel® W890	System Fans	Middle: 3 x 120x120x38mm Rear: 1 x 120x120x25mm
Memory	8-channel DDR5 RDIMM/MRDIMM, 8 x DIMMs ^[1] [RDIMM] Up to 6400 MT/s [MRDIMM] Up to 8000 MT/s ^[2] ^[1] Only 4 x DIMMs are supported with Intel® Xeon® 630 processors. ^[2] MRDIMMs are supported only on select SKUs.	Operating Properties	Operating: 10°C to 30°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)
LAN	2 x 10 Gb/s LAN (1 x Intel® X710-AT2), Support NCSI 1 x 10/100/1000 Mb/s Management LAN	Packaging Content	1 x W774-W90-AAF1 1 x CPU fansink 2 x Carriers
Video	Integrated in ASPEED® AST2600 - 1 x VGA port	Ordering Part Numbers	6NW774W90MR000AAF1*
Audio	Realtek® ALC897 HD Audio Codec Supports 2/4/5.1/7.1 channel configurations Rear: 3 x Audio jacks (Audio in/Audio out/Mic) Front: 2 x Audio jacks (Audio out/Mic)	Optional Parts	- Rail kit ((A)+(B)+(C)+(D)): (A) 25HB2-A66126-K0R (Slide Rail), Q'ty: 1 set (B) 25HB4-W77304-C0R (Rack Ear Right), Q'ty: 1 set (C) 25HB4-W77305-C0R (Rack Ear Left), Q'ty: 1 set (D) 25HB7-W77300-C0R (Top Cover for Assembly), Q'ty: 1 set
Storage	Front hot-swap: 4 x 3.5"/2.5" Gen5 NVMe/SATA/SAS-4 ^[1] 4 x 3.5"/2.5" SATA/SAS-4 ^[1] Internal M.2: 4 x M.2 (2280/22110), PCIe Gen5 x4 *SAS card is required to support SAS drives.		
RAID	Intel® SATA RAID 0/1/10/5 Onboard VROC key header		
Peripheral Drives	5.25" space reserved for ODD device		



Learn more at: <https://www.gigabyte.com/Enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.

* All trademarks and logos are the properties of their respective holders.

© 2026 Giga Computing Technology Co., Ltd. All rights reserved.

Last updated: Aug 17, 2026

Designed by

