


MZ32-AR0

AMD EPYC UP Server Motherboard

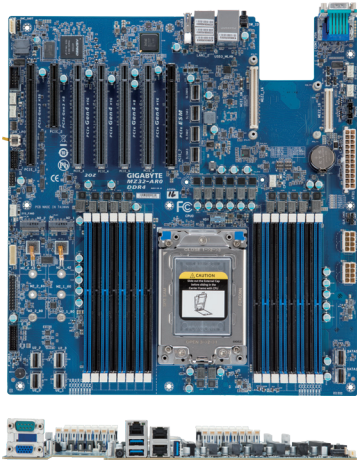

Features

- Single AMD EPYC™ 7003 Series processors
- 8-Channel RDIMM/LRDIMM DDR4, 16 x DIMMs
- 2 x 1Gb/s LAN ports (Intel® I350-AM2)
- 1 x Dedicated management port
- 2 x SlimSAS (with 8 x SATA 6Gb/s) ports
- 4 x SlimSAS (with 4 x NVMe) ports
- Ultra-Fast M.2 with PCIe Gen3 x4 interface
- Up to 5 x PCIe Gen4 slots and 2 x PCIe Gen3 slots
- 1 x OCP 2.0 Gen3 x16 mezzanine slot
- Aspeed® AST2500 remote management controller

Specification

Dimensions	E-ATX (305W x 330D mm)	Internal I/O	1 x 24-pin ATX main power connector, 2 x 8-pin ATX 12V power connectors, 10 x SlimSAS connectors, 2 x M.2 slots, 1 x CPU fan headers, 5 x System fan headers, 1 x USB 3.0 header, 1 x USB 2.0 header, 1 x COM_2 header, 1 x TPM header, 1 x Front panel header, 1 x HDD back plane board header, 1 x PMBus connector, 1 x IPMB connector, 1 x Clear CMOS jumper, 1 x BIOS recovery jumper, 1 x Buzzer
CPU	AMD EPYC™ 7003 Series processors Single processor, 7nm, Socket SP3 Up to 64-core, 128 threads per processor cTDP up to 240W, Fully support 280W Compatible with AMD EPYC™ 7002 Series processors	Rear I/O	3 x USB 3.0, 1 x VGA, 1 x COM_1, 2 x RJ45, 1 x MLAN, 1 x ID button with LED
Chipset	System on Chip	TPM	1 x TPM header with SPI interface Optional TPM2.0 kit: CTM010
Memory	8-Channel DDR4 memory, 16 x DIMM slots RDIMM/LRDIMM modules up to 128GB supported 3DS RDIMM/LRDIMM modules up to 256GB supported Memory speed: Up to 3200/ 2933 MHz	OS Compatibility	Windows Server 2016 / 2019 RHEL 8.3 (x64) or later SLES 12 SP5 (x64) / 15 SP2 (x64) or later Ubuntu 18.04.5 LTS (x64) / 20.04 LTS (x64) or later VMware ESXi 6.7 Update3 P03 / 7.0 Update1 or later Citrix Hypervisor 8.2.0 or later
LAN	2 x 1GbE LAN ports (1 x Intel® I350-AM2) 1 x 10/100/1000 management LAN	Board Management	Aspeed® AST2500 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
Video	Integrated in Aspeed® AST2500 2D Video Graphic Adapter with PCIe bus interface 1920x1200 @60Hz 32bpp	PSU Connectors	1 x 24-pin ATX main power connector 2 x 8-pin ATX 12V power connectors
SAS	-	Operating Properties	Operating temperature: 10°C to 40°C Operating humidity: 8-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
SATA	2 x SlimSAS 4i for 8 x SATA ports	Retail Packaging Content	1 x MZ32-AR0 1 x I/O shield 1 x Quick start guide 2 x SlimSAS for 8 x SATAIII 6Gb/s cables
RAID	-	Bulk Packaging Content	10 x MZ32-AR0 10 x I/O shields
Expansion Slots	Slot_7: 1 x PCIe x16 (Gen4 x16) slot; shared with 4 x NVMe ports Slot_6: 1 x PCIe x16 (Gen4 x16) slot Slot_5: 1 x PCIe x16 (Gen4 x8) slot Slot_4: 1 x PCIe x16 (Gen4 x16) slot Slot_3: 1 x PCIe x16 (Gen4 x16) slot Slot_2: 1 x PCIe x8 (Gen3 x0 or x8) slot Slot_1: 1 x PCIe x16 (Gen3 x16 or x8) slot; shared with slot_2 2 x M.2 slots: - M-key, PCIe Gen3 x4 - Supports NGFF-2242/2260/2280 cards 4 x NVMe ports (Shared with Slot_7 PCIe Gen4 x16 slot): - SlimSAS 4i type, PCIe Gen4 x4 per port	Reference Numbers	Retail: 9MZ32AR0MR-00 PCB Rev. 3.0 Bulk: 9MZ32AR0NR-00 PCB Rev. 3.0

* All specifications are subject to change without notice. Please visit our website for the latest information.

* AMD, and the AMD Arrow logo, AMD EPYC and combinations thereof are trademarks of Advanced Micro Devices, Inc.

