

TO24-JD0

ORv3 JBOD - Single-Path, 32 x SATA/SAS-4



Features

- 20U Rackmount, ORv3
- 32 x 3.5"/2.5" SATA/SAS-4 bays
- 3 x Broadcom SAS4x32 expanders
- 4 x Mini-SAS HD ports
- ASPEED® AST2520 Remote Management Controller

Specification

Dimensions 20U
W537 x H93 x D807.7 mm

Open Rack Version ORv3

LAN Front:
1 x 10/100/1000 Mbps Management LAN

Storage Front accessed:
32 x 3.5"/2.5" SATA/SAS-4

SATA Supported

SAS Support SAS-4 24Gb/s

SAS Expander 3 x Broadcom SAS4x32 expanders, single-path

System Management ASPEED® AST2520 Remote Management Controller

Front I/O 4 x Mini-SAS HD ports
1 x MLAN port
1 x UART audio jack
1 x Power button with LED
1 x ID button with LED
1 x BMC reset button
1 x System status LED
1 x MLAN access LED


System Fans 4 x 92x92x38mm (9,700rpm)

No. of Bus Bars 1 x 48V Bus Bar

Packaging Dimensions 1165 x 764 x 282 mm

Packaging Content 1 x TO24-JD0

Part Numbers Barebone package: 6NTO24JD0MR-00-1*

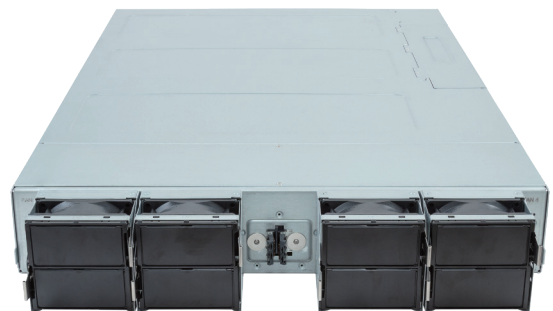

Learn more at <https://www.GIGABYTE.com/enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.

* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

