

# TO24-JD3-AA01

ORv3 JBOD - Single-Path, 32 x SATA/SAS-3



## Features

- 20U Rackmount, ORv3
- 32 x 3.5"/2.5" SATA/SAS-3 bays
- 2 x Broadcom SAS4x32 expanders
- 4 x Mini-SAS HD ports
- ASPEED® AST2520 Remote Management Controller

## Specification

**Dimensions** 20U  
W537 x H93 x D807.7 mm

**Open Rack Version** ORv3

**LAN** Upper tray: 1 x 10/100/1000 Mbps Management LAN  
Lower tray: 1 x 10/100/1000 Mbps Management LAN

**Storage** Front accessed  
Upper tray: 16 x 3.5"/2.5" SATA/SAS-3  
Lower tray: 16 x 3.5"/2.5" SATA/SAS-3

**SATA** Supported

**SAS** Support SAS 12Gb/s

**SAS Expander** Upper tray:  
1 x Broadcom SAS4x32 expander, single-path  
Lower tray:  
1 x Broadcom SAS4x32 expander, single-path

**Front I/O** 4 x Mini-SAS HD ports  
2 x MLAN ports  
1 x UART audio jack  
1 x Power button with LED  
1 x ID button with LED  
1 x BMC reset button  
1 x System status LED  
1 x MLAN access LED

**System Management** ASPEED® AST2520 Remote Management Controller


**System Fans** 4 x 92x92x38mm (9,700rpm)

**No. of Bus Bars** 1 x 48V Bus Bar

**Packaging Dimensions** 1165 x 764 x 282 mm

**Packaging Content** 1 x TO24-JD3-AA01

**Part Numbers** Barebone package: 6NTO24JD3MR000AA01\*

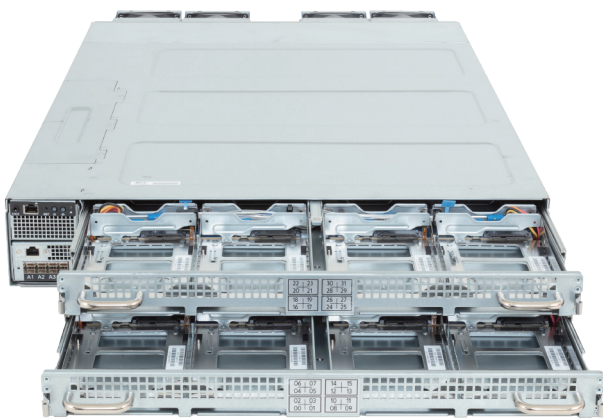

Learn more at <https://www.GIGABYTE.com/enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.

\* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

