


R263-Z33-AAL1

Rack Server - 2U UP 2 x PCIe Gen5 GPUs Titanium

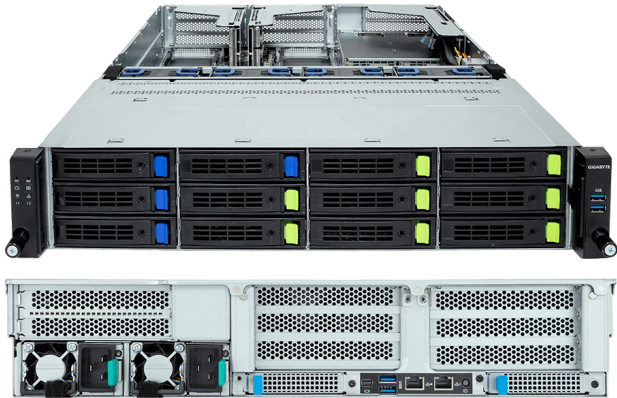

Key Features

- Supports up to 2 x Dual slot Gen5 GPUs
- Single AMD EPYC™ 9004 Series Processors
- 12-Channel DDR5 RDIMM, 12 x DIMMs
- Dual ROM Architecture
- 1 x 1Gb/s LAN port via Intel® I210-AT
- 8 x 3.5"/2.5" Gen4 NVMe/SATA/SAS hot-swap bays
- 4 x 3.5"/2.5" SATA/SAS hot-swap bays
- 1 x M.2 slot with PCIe Gen3 x4 interface
- 2 x FHFL PCIe Gen5 x16 slots for GPUs
- 1 x FHHL PCIe Gen4 x16 slot
- 2 x OCP NIC 3.0 PCIe Gen5 x16 slots
- Compatible with SupremeRAID™ by Graid Technology
- 1+1 2700W 80 PLUS Titanium redundant power supplies

Specification

Dimensions	2U (W438 x H87.5 x D710 mm)	PCIe Expansion Slots	2 x FHFL PCIe Gen5 x16, for GPUs 1 x FHHL PCIe Gen4 x16 2 x OCP NIC 3.0 PCIe Gen5 x16, Support NCSI
Motherboard	MZ33-DC0	I/O Ports	Front: 2 x USB 3.2 Gen1 Rear: 2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x RJ45, 1 x MLAN
CPU	AMD EPYC™ 9005 Series Processors AMD EPYC™ 9004 Series Processors Single processor, cTDP up to 300W - At 30°C ambient, cTDP up to 400W	Backplane Board	PCIe Gen4 x4 or SATA 6Gb/s or SAS 12Gb/s
OS Compatibility	OS Support List	TPM	1 x TPM header (SPI), Optional TPM2.0 kit: CTM010
Socket	1 x LGA 6096 (Socket SP5)	Power Supply	1+1 2700W 80 PLUS Titanium redundant power supplies AC Input: 100-240V *The system power supply requires C19 power cord.
Chipset	System on Chip	System Management	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
Memory	12-Channel DDR5 RDIMM, 12 x DIMMs Up to 4800 MT/s	System Fans	4 x 80x80x38mm
LAN	1 x 1Gb/s LAN (1 x Intel® I210-AT), Support NCSI 1 x 10/100/1000 Mbps Management LAN	Operating Properties	Operating: 10°C to 35°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)
Video	Integrated in ASPEED® AST2600 - 1 x Mini-DP	Packaging Content	1 x R263-Z33-AAL1 1 x CPU heatsink 1 x Mini-DP to D-Sub cable 2 x GPU power cables (2x PCIe 8pin, 350mm) 1 x GPU power cable (2x PCIe 8pin, 480mm) 1 x 2-Section Rail kit
Storage	Front hot-swap: 8 x 3.5"/2.5" Gen4 NVMe/SATA/SAS ^[1] 4 x 3.5"/2.5" SATA/SAS ^[1] Internal M.2: 1 x M.2 (2280/22110), PCIe Gen3 x4 ^[1] SAS card is required to support SAS drives.	Ordering Part Numbers	6NR263Z33DR000ABL1*
RAID	Require RAID add-in cards Optional compatible RAID Cards: NVMe RAID Cards with SupremeRAID™ by Graid Technology RAID Card models: SR-1000-ED12 Support RAID 0/1/5/6/10	Optional Parts	- RAID card (SR-1000-ED12): 25FC1-SRBUN3-AFS - 3-Section Rail kit (Supports CMA): 25HB2-A56120-K0R - Cable Management Arm: 25HBZ-R18100-K0R - A100/MI210 power cable (CPU 8pin, 350mm): 25CRI-350100-Y4R - A100/MI210 power cable (CPU 8pin, 480mm): 25CRI-480101-Y4R - H100 power cable (16-pin, 360mm): 25CRI-360102-Y4R - H100 power cable (16-pin, 490mm): 25CRI-490102-Y4R



Learn more at: <https://www.gigabyte.com/Enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.
* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

