


R263-ZG0-AAL2

Rack Server - 2U UP 4 x PCIe Gen5 GPUs

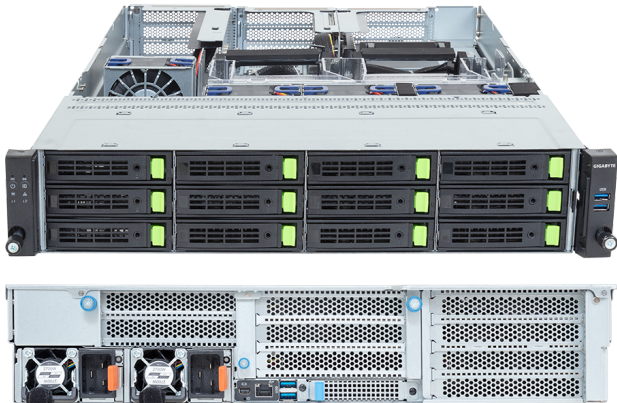

Key Features

- Supports up to 4 x Dual slot Gen5 GPUs
- Single AMD EPYC™ 9005/9004 Series Processors
- 12-Channel DDR5 RDIMM, 24 x DIMMs
- Dual ROM Architecture
- 12 x 3.5"/2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 2 x M.2 slots with PCIe Gen3 x2 interface
- 4 x FHFL PCIe Gen5 x16 slots for GPUs
- 1 x FHHL PCIe Gen5 x16 slot
- Dual 2700W 80 PLUS Titanium redundant power supply

Applications

AI Platform, AI Training Server, AI Inference Server, Visual Computing, High-Performance Computing Server, Networks Server, Servers for Hybrid/Private Cloud...

Specification

Dimensions	2U (W438 x H87.5 x D815 mm)	PCIe Expansion Slots	4 x FHFL PCIe Gen5 x16 for GPUs 1 x FHHL PCIe Gen5 x16
Motherboard	MZG3-GU0	I/O Ports	Front: 2 x USB 3.2 Gen1 Rear: 2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x MLAN
CPU	AMD EPYC™ 9005 Series Processors AMD EPYC™ 9004 Series Processors Single processor, cTDP up to 400W - At 25°C ambient, cTDP up to 500W	Backplane Board	PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
OS Compatibility	OS Support List	TPM	1 x TPM header (SPI), Optional TPM2.0 kit: CTM012
Socket	1 x LGA 6096 (Socket SP5)	Power Supply	Dual 2700W 80 PLUS Titanium redundant power supply AC Input: 100-240V *The system power supply requires C19 power cord.
Chipset	System on Chip	System Management	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
Memory	12-Channel DDR5 RDIMM, 24 x DIMMs [EPYC 9005] Up to 5200 MT/s (1DPC) Up to 4400 MT/s (1R 2DPC), 4000 MT/s (2R 2DPC) [EPYC 9004] Up to 4800 MT/s (1DPC), 3600 MT/s (2DPC)	System Fans	4 x 80x80x56mm
LAN	1 x 10/100/1000 Mbps Management LAN	Operating Properties	Operating: 10°C to 30°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)
Video	Integrated in ASPEED® AST2600 - 1 x Mini-DP	Packaging Content	1 x R263-ZG0-AAL2 1 x CPU heatsink 1 x Mini-DP to D-Sub cable 1 x GPU power cable (16-pin, 250mm) 2 x GPU power cables (16-pin, 450mm) 1 x GPU power cable (16-pin, 550mm) 1 x 2-Section Rail kit
Storage	Front hot-swap: 12 x 3.5"/2.5" Gen5 NVMe/SATA/SAS-4 ^[1] Internal M.2: 2 x M.2 (2280/22110), PCIe Gen3 x2 ^[1] Storage card is required to support SATA and SAS drives.	Ordering Part Numbers	6NR263ZG0DR000ACL2*
RAID	Require RAID add-in cards	Optional Parts	- 3-Section Rail kit (Supports CMA): 25HB2-A56121-K0R - Cable Management Arm: 25HB1-R18300-K0R

