


# R284-A90-AAL2

Rack Server - 2U DP 12-Bay Gen5 NVMe/SATA/SAS-4

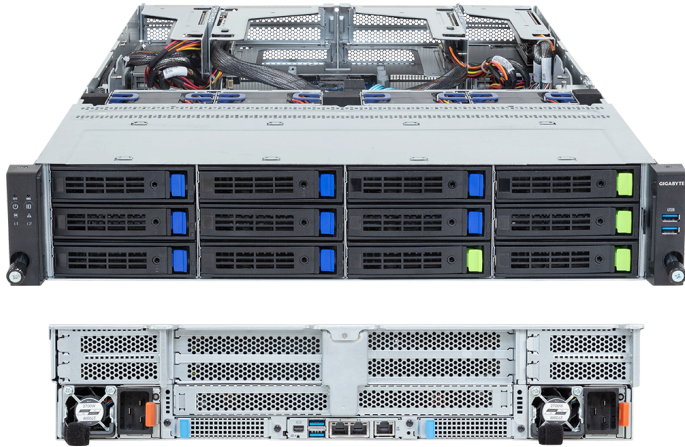

## Key Features

- Dual Intel® Xeon® 6 Processors, LGA 7529
- 12-Channel DDR5 RDIMM / MRDIMM, 24 x DIMMs
- Dual ROM Architecture
- 2 x 1Gb/s LAN ports via Intel® I350-AM2
- 4 x 3.5"/2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 8 x 3.5"/2.5" SATA/SAS-4 hot-swap bays
- 2 x M.2 slots with PCIe Gen5 x4 and x2 interface
- 6 x FHHL PCIe Gen5 x16 slots
- 4 x LP PCIe Gen5 x8 slots
- 2 x OCP NIC 3.0 PCIe Gen5 x16 slots
- 1+1 2700W 80 PLUS Titanium redundant power supplies

## Specification

Dimensions	2U (W438 x H87.5 x D815 mm)	PCIe Expansion Slots	6 x FHHL PCIe Gen5 x16 4 x LP PCIe Gen5 x8 2 x OCP NIC 3.0 PCIe Gen5 x16
Motherboard	MA94-FS0	I/O Ports	<b>Front:</b> 2 x USB 3.2 Gen1 <b>Rear:</b> 2 x USB 3.2 Gen1, 1 x Mini-DP, 2 x RJ45, 1 x MLAN
CPU	Intel® Xeon® 6 Processors - Intel® Xeon® 6900-Series Processors Dual processor, TDP up to 500W	Backplane Board	PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
OS Compatibility	<a href="#">OS Support List</a>	TPM	1 x TPM header (SPI), Optional TPM2.0 kit: CTM012 1 x PRoT connector (only enabled on RoT SKU)
Socket	2 x LGA 7529 (Socket BR)	Power Supply	1+1 2700W 80 PLUS Titanium redundant power supplies AC Input: 100-240V *The system power supply requires C19 power cord.
Chipset	System on Chip	System Management	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
Memory	12-Channel DDR5 RDIMM / MRDIMM, 24 x DIMMs [RDIMM] Up to 6400 MT/s [MRDIMM] Up to 8800 MT/s [1] [1] MRDIMMs are only supported with Intel® Xeon® 6 Processors with P-cores.	System Fans	4 x 80x80x56mm (15,500rpm)
Lan	2 x 1Gb/s LAN (1 x Intel® I350-AM2), Support NCSI 1 x 10/100/1000 Mbps Management LAN	Operating Properties	Operating: 10°C~35°C, 8%~80% (non-condensing) Non-operating: -40°C~60°C, 20%~95% (non-condensing)
Video	Integrated in ASPEED® AST2600 - 1 x Mini-DP	Packaging Content	1 x R284-A90-AAL2 2 x CPU heatsinks 1 x Mini-DP to D-Sub cable 2 x Carriers 1 x 2-Section Rail kit
Storage	<b>Front hot-swap:</b> 4 x 3.5"/2.5" Gen5 NVMe/SATA/SAS-4 [1] 8 x 3.5"/2.5" SATA/SAS-4 [1] <b>Internal M.2:</b> 1 x M.2 (2280/22110), PCIe Gen5 x4 1 x M.2 (2280/22110), PCIe Gen5 x4, <b>occupied for SATA</b> 1 x M.2 (2280), PCIe Gen5 x2 [1] SAS card is required to support SAS drives.	Ordering Part Numbers	6NR284A90DR000AAL2*
RAID	Require RAID add-in cards Onboard VROC key header	Optional Parts	- C19 power cord 125V/15A (US): 25CP1-018000-Q0R - C19 power cord 250V/16A (EU): 25CP3-01830H-Q0R - C19 power cord 125V/15A (JP): 25CPA-01830B-Q0R - 3-Section Rail kit (Supports CMA): 25HB2-A56121-K0R - Cable Management Arm: 25HB1-R18300-K0R



Learn more at: <https://www.gigabyte.com/Enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.  
\* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

