


E163-S30-AAG1

Edge Server - 1U UP 2-Bay NVMe/SATA/SAS

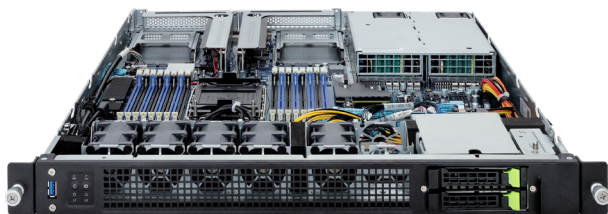

Features

- 4th/5th Gen Intel® Xeon® Scalable Processors
- Intel® Xeon® CPU Max Series
- Single processor, LGA4677
- 8-Channel RDIMM DDR5 per processor, 16 x DIMMs
- Dual ROM Architecture
- 1 x 1Gb/s LAN port (Intel® I210-AT)
- 1 x Dedicated management port
- 2 x 2.5" Gen4 NVMe/SATA/SAS hot-swappable bays
- 1 x M.2 slot with PCIe Gen3 x4 interface
- 2 x FHHL PCIe Gen5 x16 slots
- 2 x OCP 3.0 Gen5 x16 slots
- 1+1 850W 80 PLUS Titanium redundant power supplies

Specification

Dimensions	1U (W438 x H43.5 x D520 mm)	Rear I/O	2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x RJ45, 1 x MLAN
Motherboard	MS33-DC0	Backplane I/O	PCIe Gen4 x4 or SATA 6Gb/s or SAS 12Gb/s
CPU	5th Generation Intel® Xeon® Scalable Processors 4th Generation Intel® Xeon® Scalable Processors Intel® Xeon® CPU Max Series Single processor, TDP up to 350W	TPM	1 x TPM header with SPI interface (Optional TPM2.0 kit: CTM010)
Socket	1 x LGA 4677 (Socket E)	Power Supply	1+1 850W 80 PLUS Titanium redundant power supplies AC Input: 100-240V
Chipset	Intel® C741 Chipset	System Management	Aspeed® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
Memory	8-Channel DDR5 memory, 16 x DIMM slots RDIMM modules up to 128GB supported 3DS RDIMM modules up to 256GB supported Memory speed: Up to 5600 MHz (1DPC), 4400 MHz (2DPC)	OS Compatibility	Windows Server 2019 / 2022 RHEL 8.6 / 8.7 / 9.0 / 9.1 / 9.2 / 9.3 (x64) SLES 15 SP4 / SP5 (x64) Ubuntu 22.04 / 22.04.1 / 22.04.2 / 22.04.3 LTS (x64) VMware ESXi 7.0 Update 3o / 8.0 / 8.0 Update 1 / 8.0 Update 2 Citrix Hypervisor 8.2 LTSR CU1
LAN	1 x 1Gb/s LAN ports (1 x Intel® I210-AT) Supported NCSI function 1 x 10/100/1000 management LAN	System Fans	5 x 40x40x56mm (30,000rpm)
Video	Integrated in Aspeed AST2600 2D Video Graphic Adapter with PCIe bus interface 1920x1200@60Hz 32bpp, DDR4 SDRAM	Operating Properties	Operating temperature: 10°C to 35°C Operating humidity: 8-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
Storage	2 x 2.5" Gen4 NVMe/SATA/SAS hot-swappable bays SAS card is required for SAS devices support	Packaging Content	1 x E163-S30, 1 x CPU heatsink, 1 x Mini-DP to D-Sub cable, 3 x Carrier clips
RAID	Intel® SATA RAID 0/1/10/5	Reference Numbers	Barebone package (4th/5th Gen): 6NE163S30DR000ABG1* Barebone package (4th Gen): 6NE163S30DR000AAG1* - Motherboard: 9MS33DC0UR-000 - CPU heatsink: 25ST1-4Z3200-S7R - Mini-DP to D-Sub cable: 25CRN-200801-K1R - Power supply: 25EPO-208503-D0S
Expansion Slots	2 x FHHL PCIe Gen5 x16 slots 2 x OCP 3.0 Gen5 x16 slots - Supporte NCSI function 1 x M.2 slot (M-key, PCIe Gen3 x4, NGFF-2280/22110)		
Front I/O	1 x USB 3.2 Gen1		



Learn more about GIGABYTE server, visit <https://www.gigacomputing.com>

* All specifications are subject to change without notice. Please visit our website for the latest information.

* Intel, the Intel logo, Xeon, and other Intel marks are trademarks of Intel Corporation or its subsidiaries.

* All other brands, logos and names are property of their respective owners.

© 2024 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

