


G593-SD1-AAX3

HPC/AI Server - 5U DP NVIDIA HGX™ H200 8-GPU

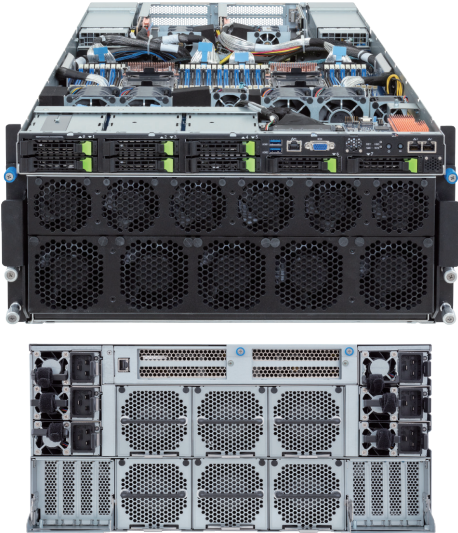

Features

- 5U server system with NVIDIA HGX™ H200 8-GPU
- 900GB/s GPU-to-GPU bandwidth with NVLink® and NVSwitch™
- Dual 5th/4th Gen Intel® Xeon® Scalable Processors
- Dual Intel® Xeon® CPU Max Series
- 8-Channel DDR5 RDIMM, 32 x DIMMs
- Dual ROM Architecture
- Compatible with NVIDIA BlueField®-3 DPU/SuperNICs
- 2 x 10Gb/s LAN ports via Intel® X710-AT2
- 8 x 2.5" Gen5 NVMe/SATA/SAS-4 hot-swappable bays
- 4 x FHHL PCIe Gen5 x16 slots
- 8 x LP PCIe Gen5 x16 slots
- 4+2 3000W 80 PLUS Titanium redundant power supplies

Application

AI, AI Inference, AI Training, High-Performance Computing

Specification

Dimensions	5U (W447 x H219.7 x D945 mm)	Backplane Board	Speed and bandwidth: PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
Motherboard	MSB3-G41	TPM	1 x TPM header with SPI interface (Optional TPM2.0 kit: CTM010)
CPU	5th/4th Generation Intel® Xeon® Scalable Processors Intel® Xeon® CPU Max Series Dual processor, TDP up to 350W	Power Supply	4+2 3000W 80 PLUS Titanium redundant power supply AC Input: 115-240V *The system power supply requires C19 power cord.
Socket	2 x LGA 4677 (Socket E)	System Management	ASPEED® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
Chipset	Intel® C741 Chipset	OS Support	Windows Server, Red Hat Enterprise Linux Server, VMware ESXi, SUSE Linux Enterprise, Ubuntu Server, Citrix Hypervisor
Memory	8-Channel DDR5 memory, 32 x DIMM slots RDIMM up to 96GB; 3DS RDIMM modules up to 256GB Memory speed: Up to 5600 MT/s (1DPC), 4400 MT/s (2DPC)	System Fans	2 x 40x40x28mm (25,000rpm), 4 x 60x60x56mm (24,000rpm), 4 x 40x40x28mm (25,000rpm), 2 x 40x40x56mm (32,000rpm) 6 x 60x60x76mm (21,700rpm), 11 x 80x80x80mm (17,000rpm)
LAN	2 x 10Gb/s LAN ports (1 x Intel® X710-AT2) - Support NCSI function 1 x 10/100/1000 management LAN	Operating Properties	Operating temperature: 10°C to 35°C Operating humidity: 8-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
Video	Integrated in ASPEED® AST2600 - 1 x VGA port	Packaging Content	1 x G593-SD1-AAX3, 2 x CPU heatsinks, 6 x Carriers, 1 x Rail kit Packaging Dimensions: 1200 x 890 x 700 mm
Storage	8 x 2.5" Gen5 NVMe/SATA/SAS4 hot-swappable HDD/SSD bays *SAS card is required to support SAS drives.	Part Numbers	Barebone w/ NVIDIA module: 6NG593SD1DR000ABX3* - L-shape Rail kit: 25HB2-A96102-K0R - CPU heatsink: 25ST1-24320H-M1R - Power supply: 25EP0-23000J-D0S - C19 power cord 125V/15A (US): 25CP1-018000-Q0R (optional) - C19 power cord 250V/16A (EU): 25CP3-01830H-Q0R (optional) - C19 power cord 125V/15A (JP): 25CPA-01830B-Q0R (optional)
RAID	Intel® SATA RAID 0/1/10/5 Support optional RAID add-in cards		
Expansion Slots	NVIDIA HGX™ H200 with 8 x SXM5 GPUs (8-root ports) 4 x PCIe x16 (Gen5 x16) FHHL slots 8 x PCIe x16 (Gen5 x16) low-profile slots		
I/O Ports	Front: 2 x USB 3.2 Gen1, 1 x VGA, 2 x RJ45, 1 x MLAN (default) Rear: 1 x MLAN Internal: 1 x TPM header, 1 x VROC connector		



Learn more at <https://www.GIGABYTE.com/enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.
* Intel, the Intel logo, Xeon, and other Intel marks are trademarks of Intel Corporation or its subsidiaries.
* NVIDIA, the NVIDIA logo are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. All other brands, logos and names are property of their respective owners.

© 2024 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

