


G593-ZD1-AAX1

HPC/AI Server - 5U DP HGX H100 8-GPU 8-Root Port

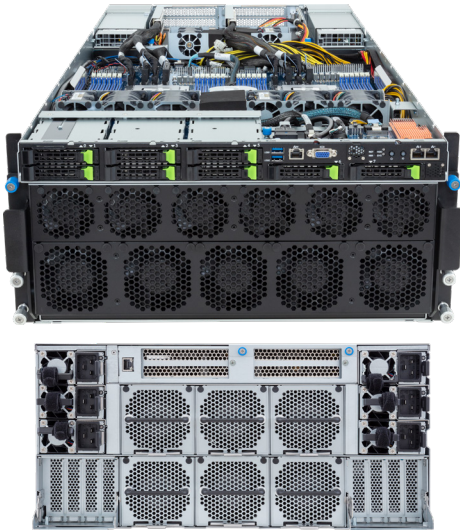

Features

- NVIDIA HGX™ H100 with 8 x SXM5 GPUs
- 900GB/s GPU-to-GPU bandwidth with NVLink® and NVSwitch™
- Dual AMD EPYC™ 9004 Series Processors
- 12-Channel RDIMM DDR5, 24 x DIMMs
- Dual ROM Architecture
- 2 x 10Gb/s BASE-T LAN ports via Intel® X710-AT2
- 2 x M.2 slots with PCIe Gen3 x4 and x1 interface
- 8 x 2.5" Gen5 NVMe hot-swappable bays
- 4 x FHHL PCIe Gen5 x16 slots
- 8 x LP PCIe Gen5 x16 slots
- 4+2 3000W 80 PLUS Titanium redundant power supplies

Application

AI, AI Inference, AI Training, High-Performance Computing

Specification

Dimensions	5U (W447 x H222.25 x D945 mm)
Motherboard	MZB3-G43
CPU	AMD EPYC™ 9004 Series processors AMD EPYC™ 9004 Series processors with AMD 3D V-Cache™ Dual processor, 5nm technology cTDP up to 300W at ambient 35°C 2 x LGA 6096 Socket SP5
Chipset	System on Chip
Memory	24 x DIMM slots, 12-Channel DDR5 memory, up to 4800 MT/s RDIMM modules up to 96GB supported 3DS RDIMM modules up to 256GB supported
LAN	2 x 10Gb/s BASE-T LAN ports (Intel® X710-AT2) - Supported NCSI 1 x 10/100/1000 management LAN
Video	ASPEED® AST2600 Integrated 2D Graphic Adapter
Storage	8 x 2.5" Gen5 NVMe/SATA/SAS-4* hot-swappable bays* * Storage card is required to support SATA and SAS drives. 1 x M.2 slot: M-key, PCIe Gen3 x4, supports 2280/22110 cards 1 x M.2 slot: M-key, PCIe Gen3 x1, supports 2280/22110 cards
Expansion Slots	NVIDIA HGX™ H100 with 8 x SXM5 GPUs 8 x PCIe Gen5 x16 low-profile slots 4 x PCIe Gen5 x16 FHHL slots
I/O ports	Front side: 2 x USB 3.2 Gen1, 1 x VGA, 2 x RJ45, 1 x MLAN (default) Rear side: 1 x MLAN
TPM	1 x TPM header with SPI interface (Optional TPM2.0 kit: CTM010)

Backplane Board	Speed and bandwidth: PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
Power Supply	4+2 3000W 80 PLUS Titanium redundant power supply AC Input: 115-240V
System Management	ASPEED® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
OS Compatibility	Windows Server 2019 / 2022 RHEL 8.6 / 8.7 / 8.8 / 9.0 / 9.1 / 9.2 / 9.3 / 9.4 SLES 15 SP4 / 15 SP5 / 15 SP6 Ubuntu 22.04 / 22.04.1 / 22.04.2 / 22.04.3 / 22.04.4 / 24.04 LTS VMware ESXi 7.0 Update 3i / 8.0 Update 1, Update 2, Update 3 Citrix Hypervisor r 8.2 LTSR CU1
System Fans	6 x 40x40x28mm (25,000rpm), 2 x 40x40x56mm (29,700rpm), 4 x 60x60x56mm (24,000rpm), 6 x 60x60x76mm (21,700rpm), 6 x 80x80x80mm (17,000rpm), 5 x 80x80x80mm (17,200rpm)
Operating Properties	Operating temperature: 10°C to 35°C Operating humidity: 8-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
Packaging Content	1 x G593-ZD1-AAX1, 2 x CPU heatsinks, 1 x L-shape Rail kit Packaging Dimensions: 1200 x 890 x 700 mm
Part Numbers	Barebone w/ NVIDIA module: 6NG593ZD1DR000AAX1* - L-shape Rail kit: 25HB2-A96102-K0R - CPU heatsink: 25ST1-44320Z-C1R - Power supply: 25EP0-23000J-D0S - C19 power cord 125V/15A (US): 25CP1-018000-Q0R (optional) - C19 power cord 250V/16A (EU): 25CP3-01830H-Q0R (optional) - C19 power cord 125V/15A (JP): 25CPA-01830B-Q0R (optional)



Learn more about GIGABYTE server at <https://www.gigabyte.com/Enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.
* AMD, the AMD Arrow logo, EPYC and combinations thereof are trademarks of Advanced Micro Devices, Inc.
* NVIDIA, the NVIDIA logo are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. All other brands, logos and names are property of their respective owners.

© 2024 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

