


MW53-HP0

Intel Xeon W Workstation Board

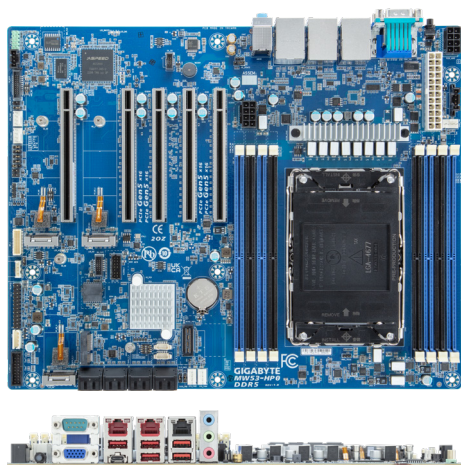

Features

- Intel® Xeon® W-3400 / W-2400 Processors
- Single processor, LGA 4677
- Intel® W790 Chipset
- 4-Channel RDIMM DDR5, 8 x DIMMs
- 2 x 2.5Gb/s LAN ports via Intel® I226-LM
- 8 x SATA 6Gb/s ports
- 3 x M.2 slots with PCIe Gen4 x4 interface
- 1 x M.2 slot with PCIe Gen3 x1 interface for Wi-Fi add-in cards
- 4 x PCIe Gen5 x16 expansion slots
- 1 x PCIe Gen3 x4 expansion slot
- ASPEED® AST2600 BMC

Specification

Form Factor	ATX (304.8W x 244D mm)	Internal I/O	1 x CPU fan header, 4 x System fan headers, 1 x USB 3.2 Gen1 header, 1 x Front audio header, 1 x PMBus connector, 1 x Clear CMOS jumper, 8 x SATA connectors, 1 x Front panel header, 1 x Backplane board header, 1 x TPM header, 1 x VROC header
CPU	Intel® Xeon® W-3400 / W-2400 Processors Single processor, TDP up to 350W	TPM	1 x TPM header with SPI interface Optional TPM2.0 kit: CTM010
Socket	1 x LGA 4677	OS Compatibility	CentOS Stream 9 (x64) Debian 11.5.0 Red Hat Enterprise Linux 9.0 (x64) Ubuntu 22.04 LTS (x64) Windows 11 Enterprise (x64)
Chipset	Intel® W790 Chipset	Board Management	ASPEED® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
Memory	4-channel DDR5 memory, 8 x DIMM slots RDIMM up to 64GB supported 3DS RDIMM up to 256GB supported Memory speed: Up to 4800 MT/s (1DPC), 4400 MT/s (2DPC)	PSU Connectors	1 x 24-pin ATX main power connector 2 x 8-pin ATX 12V power connectors
LAN	2 x 2.5Gb/s LAN ports (2 x Intel® I226-LM) 1 x 10/100/1000 Mbps Management LAN	Operating Properties	Operating temperature: 10°C to 40°C Operating humidity: 8-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
Video	Integrated in ASPEED® AST2600 2D Video Graphic Adapter with PCIe bus interface 1920x1200@60Hz 32bpp	Retail Packaging Content	1 x MW53-HP0, 1 x I/O shield, 1 x Quick start guide, *1 x W-2400 (E1B) carrier, 3 x M.2 heatsinks, 4 x SATA 6Gb/s cables (500mm) Box dimensions: 360 x 330 x 80 mm Carton dimensions: 674 x 424 x 385 mm
Audio	Realtek® ALC897 HD Audio Codec Supports 2/4/5.1/7.1 channel configurations 3 x Audio jacks (Audio in/Audio out/Mic)	Bulk Packaging Content	10 x MW53-HP0, 10 x I/O shields, *10 x W-2400 (E1B) carriers Carton dimensions: 600 x 473 x 495 mm
SATA	8 x SATA 6Gb/s ports	Reference Numbers	Retail: 9MW53HP0MR-000-1* Bulk: 9MW53HP0NR-000-1*
RAID	Intel® SATA RAID 0/1/10/5		
Expansion Slots	4 x PCIe x16 (Gen5 x16) slots 1 x PCIe x16 (Gen3 x4) slot 3 x M.2 slots for storage: M-key, PCIe Gen4 x4, support 2280 cards 1 x M.2 slot for Wi-Fi: E-key, PCIe Gen3 x1, supports 2230 cards		
Rear I/O	1 x VGA, 1 x COM, 2 x RJ45, 1 x MLAN, 3 x Audio jacks, 5 x USB 3.2 Gen2x1 (Type-A), 1 x USB 3.2 Gen2x2 (Type-C)		



Learn more server solutions at www.gigabyte.com/Enterprise

* All specifications are subject to change without notice. Please visit our website for the latest information.
* Intel, the Intel logo, Xeon, and other Intel marks are trademarks of Intel Corporation or its subsidiaries.
* All other brands, logos and names are property of their respective owners.

© 2023 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

