


MZ33-AR0

AMD EPYC 9004 UP Server Motherboard

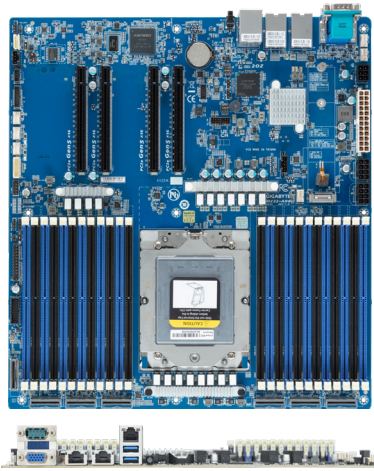

Features

- AMD EPYC™ 9004 series processors
- AMD EPYC™ 9004 series processors with AMD 3D V-Cache™
- Single processor, 5nm technology
- 12-Channel RDIMM DDR5, 24 x DIMMs
- 2 x 10Gb/s BASE-T LAN ports
- 1 x Dedicated management port
- 7 x MCIO 8i with Gen5/Gen4 NVMe and SATA ports
- Max. 16 x SATA 6Gb/s devices supported
- 1 x M.2 slot with PCIe Gen4 x4 interface
- 4 x PCIe Gen5 x16 expansion slots

Specification

Form Factor	E-ATX (305W x 330D mm)	Rear I/O	2 x USB 3.2 Gen1, 1 x VGA, 1 x COM, 2 x RJ45, 1 x MLAN
CPU	AMD EPYC™ 9004 series processors AMD EPYC™ 9004 series processors with AMD 3D V-Cache™ Single processor, 5nm technology, cTDP up to 400W Up to 128-core, 256 threads per processor 1 x LGA 6096, Socket SP5	Internal I/O	7 x MCIO 8i connectors, 1 x TPM header, 1 x CPU fan header, 5 x System fan headers, 1 x USB 3.2 Gen1 header, 1 x Front panel header, 1 x HDD back plane board header, 1 x PMBus connector, 1 x IPMB connector, 1 x Clear CMOS jumper, 1 x BIOS recovery jumper, 1 x Buzzer
Chipset	System on Chip	OS Compatibility	Windows Server 2019 / 2022 RHEL 8.6 / 8.7 / 8.8 / 9.0 / 9.1 / 9.2 (x64) SLES 15 SP4 / 15 SP5 (x64) Ubuntu 20.04.6 / 22.04 / 22.04.1 / 22.04.2 / 22.04.3 LTS (x64) VMware ESXi 7.0 Update 3i / 8.0 / 8.0 Update 1 Citrix Hypervisor 8.2 LTSR CU1
Memory	12-Channel DDR5 memory, 24 x DIMM slots RDIMM modules up to 96GB supported 3DS RDIMM modules up to 256GB supported Memory speed: Up to 4800 MHz (1DPC), 3600 MHz (2DPC)	Board Management	Aspeed® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
LAN	2 x 10Gb/s BASE-T LAN ports (1 x Broadcom® BCM57416) NCSI function supported 1 x 10/100/1000 management LAN	PSU Connectors	1 x 24-pin ATX main power connector 2 x 8-pin ATX 12V power connectors 1 x 6-pin ATX 12V power connector
Video	Integrated in Aspeed® AST2600 2D Video Graphic Adapter with PCIe bus interface 1920x1200@60Hz 32bpp, DDR4 SDRAM	Operating Properties	Operating temperature: 10°C to 40°C Operating humidity: 8-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
SATA	2 x MCIO 8i with 16 x SATA ports	Retail Packaging Content	1 x MZ33-AR0, 1 x I/O shield, 1 x Quick start guide, 1 x MCIO 8i to 8 x SATA 6Gb/s cable Single Box dimensions: 409 x 355 x 78 mm
Expansion Slots	4 x PCIe x16 (Gen5 x16) slots 1 x M.2 slot: - M-key, PCIe Gen4 x4, supports NGFF-2280/22110 cards Total 7 x MCIO 8i connectors ports: - 4 x MCIO 8i connectors for 8 x Gen5 NVMe - 2 x MCIO 8i connectors for 4 x Gen5 NVMe or 16 x SATAIII - 1 x MCIO 8i connector for 2 x Gen4 NVMe	Bulk Packaging Content	10 x MZ33-AR0, 10 x I/O shields Carton dimensions: 600 x 473 x 517 mm
TPM	1 x TPM header with SPI interface Optional TPM2.0 kit: CTM010	Reference Numbers	Retail: 9MZ33AR0MR-000-10* Bulk: 9MZ33AR0NR-000-10*



Learn more about GIGABYTE server, visit <https://www.gigacomputing.com>

* All specifications are subject to change without notice. Please visit our website for the latest information.
* AMD, the AMD Arrow logo, EPYC and combinations thereof are trademarks of Advanced Micro Devices, Inc.
* All other brands, logos and names are property of their respective owners.

© 2023 Giga Computing Technology Co., Ltd. All rights reserved.

Engineered by

