


R133-C11-AAB1

Rack Server - 1U UP 8-Bay SATA

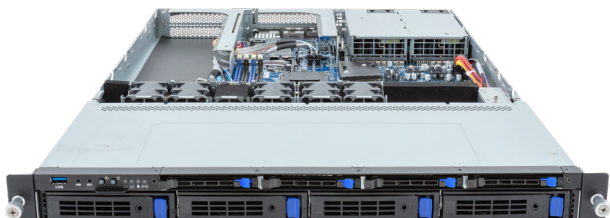

Features

- Supports 1 x Dual slot Gen5 GPU card
- Single AMD EPYC™ 4004 / Ryzen™ 7000 series processors
- Dual Channel ECC/Non-ECC DDR5 UDIMM, 4 x DIMMs
- 2 x 10Gb/s LAN ports (Broadcom® BCM57416)
- 2 x 1Gb/s LAN ports (Broadcom® BCM5720)
- 4 x 3.5"/2.5" + 4 x 2.5" 7mm SATA hot-swap bays
- 1 x M.2 slot with PCIe Gen4 x4 interface
- 1 x FHFL PCIe Gen5 x16 slot
- 1 x FHHL PCIe Gen4 x4 slot
- 1+1 800W 80 PLUS Platinum redundant power supplies

Application

Networking

Specification

Dimensions	1U (W438 x H43.5 x D710 mm)	Rear I/O	2 x USB 3.2 Gen1, 1 x Mini-DP, 4 x RJ45, 1 x MLAN
Motherboard	MC13-BL0	TPM	1 x TPM header with SPI interface Optional TPM2.0 kit: CTM010
CPU	AMD EPYC™ 4004 Series Processors (with AMD 3D V-Cache™) AMD Ryzen™ 7000 Series Processors (with AMD 3D V-Cache™) Single processor, 5nm technology, Socket AM5 TDP up to 170W	Power Supply	1+1 800W 80 PLUS Platinum redundant power supplies AC Input: 100-240V
Chipset	AMD B650E	System Management	ASPEED® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
Memory	2-Channel DDR5 memory, 4 x DIMM slots DIMM modules up to 32GB supported ECC Unbuffered DIMM 1Rx8/2Rx8 modules supported Non-ECC Unbuffered DIMM 1Rx8/2Rx8/1Rx16 modules supported Memory speed: up to 5200 MHz (1DPC), 3600 MHz (2DPC)	OS Compatibility	EPYC 4004 Series: Ubuntu 22.04 / Ubuntu 24.04 Windows Server 2022 Ryzen 7000 Series: Windows 10 21H2 / Windows 11
LAN	2 x 10Gb/s LAN ports (1 x Broadcom® BCM57416) 2 x 1GbE LAN ports (2 x Broadcom® BCM5720) Supported NCSI function on BCM5720 and BCM57416 (by switch) 1 x 10/100/1000 management LAN	System Fans	2 x 40x40x56mm (29,700rpm), 3 x 40x40x56mm (32,000rpm)
Video	Integrated in ASPEED® AST2600 2D Video Graphic Adapter with PCIe bus interface 1920x1200@60Hz 32bpp, DDR4 SDRAM	Operating Properties	Operating temperature: 10°C to 30°C Operating humidity: 8%-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
Storage	4 x 3.5"/2.5" SATA hot-swappable bays 4 x 2.5" 7mm SATA hot-swappable bays SATA supported only	Packaging Content	1 x R133-C11-AAB1, 1 x CPU heatsink, 1 x 2-Section Rail kit, 1 x GPU power cable (2x4pin to 2x 2x4pin), 1 x Mini-DP to D-Sub cable
RAID	RAID 0/1/10	Part Numbers	Barebone package (EPYC/Ryzen): 6NR133C11MR000ABB1* Barebone package (Ryzen): 6NR133C11MR000AAB1* - Motherboard: 9MC13BL0NR-000 - CPU heatsink: 25ST1-443300-S7R - 2-Section Rail kit (CMA not supported): 25HB2-3A0203-K0R - Mini-DP to D-Sub cable: 25CRN-200801-K1R - GPU power cable (8+8pin, PCIe): 25CRI-700004-G5R - Power supply: 25EP0-208009-F3S
Expansion Slots	1 x PCIe x16 (Gen5 x16) FHFL slot, for GPUs 1 x PCIe x4 (Gen4 x4) FHHL slot 1 x M.2 slot (M-key, PCIe Gen4 x4, supports 2280/22110 cards)		
Front I/O	1 x USB 3.2 Gen1		



Learn more about GIGABYTE server at <https://www.gigacomputing.com>

Designed by



* All specifications are subject to change without notice. Please visit our website for the latest information.
* AMD, the AMD Arrow logo, EPYC, Ryzen and combinations thereof are trademarks of Advanced Micro Devices, Inc. All other brands, logos and names are property of their respective owners.

© 2024 Giga Computing Technology Co., Ltd. All rights reserved.