


R182-34A

Rack Server - 1U DP 4-Bay Gen4 NVMe/SATA/SAS

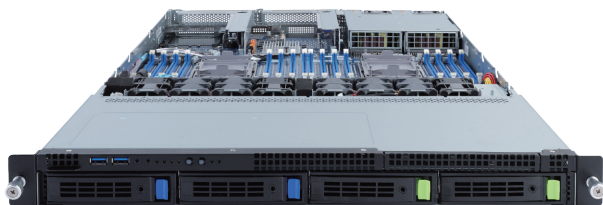

Features

- Dual 3rd Gen. Intel® Xeon® Scalable Processors
- 8-Channel RDIMM/LRDIMM DDR4 per processor, 16 x DIMMs
- Intel® C621A Chipset
- Dual ROM Architecture
- Supports GRAID SupremeRAID NVMe/NVMe-oF RAID Card
- 1 x Dedicated management port
- 2 x 3.5"/2.5" Gen4 NVMe/SATA/SAS hot-swappable bays
- 2 x 3.5"/2.5" SATA/SAS hot-swappable bays
- 2 x 7-pin SATA DOM supported
- 2 x FHHL PCIe Gen4 x16 slots
- 1 x OCP 3.0 Gen4 x16 slot
- 1 x OCP 2.0 Gen3 x8 mezzanine slot
- 1+1 800W 80 PLUS Platinum redundant power supplies

Specification

Dimensions	1U (W438 x H43.5 x D780 mm)	Backplane Board	Speed and bandwidth: PCIe Gen4 x4 or SATA 6Gb/s or SAS 12Gb/s
Motherboard	MR92-FS2	TPM	1 x TPM header with SPI interface Optional TPM2.0 kit: CTM010
CPU	3rd Generation Intel® Xeon® Scalable Processors Dual processor, 10nm technology CPU TDP up to 205W 2 x LGA 4189 sockets (Socket P+)	Power Supply	1+1 800W 80 PLUS Platinum power supplies (-100) 1+1 800W 80 PLUS Titanium power supplies (-1T0) AC Input: 100-240V
Chipset	Intel® C621A Chipset	System Management	ASPEED® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
Memory	8-Channel DDR4 memory, 16 x DIMM slots RDIMM modules up to 128GB supported LRDIMM modules up to 128GB supported 3DS RDIMM/LRDIMM modules up to 256GB supported 1.2V modules: 3200/2933/2666 MHz	OS Compatibility	Windows Server, Red Hat Enterprise Linux , VMware ESXi , SUSE Linux Enterprise Server, Ubuntu, Citrix Hypervisor
LAN	1 x 10/100/1000 management LAN	System Fans	5 x 40x40x56mm (29,700rpm), 3 x 40x40x28mm (25,000rpm)
Video	ASPEED® AST2600 Integrated 2D Graphic Adapter	Operating Properties	Operating temperature: 10°C to 35°C Operating humidity: 8-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
Storage	2 x 3.5"/2.5" Gen4 NVMe/SATA/SAS hot-swappable bays 2 x 3.5"/2.5" SATA/SAS hot-swappable bays SAS card is required for SAS devices support	Packaging Content	1 x R182-34A, 2 x CPU heatsinks, 1 x 2-Section Rail kit Packaging Dimensions: 982 x 588 x 250 mm
RAID	Intel® SATA RAID 0/1/10/5	Part Numbers	Barebone package: 6NR18234AMR-00-1* - Motherboard: 9MR92FS2NR-00 - 2-Section Rail kit (CMA not supported): 25HB2-3A0203-K0R - CPU heatsink: 25ST1-25320H-M1R - Power supply (-100): 25EP0-208004-L0S - Power supply (-1T0): 25EP0-20800C-G1S - VROC module: 25FD0-R181N0-10R (optional) - 3-Section Rail kit (Supports CMA): 25HB2-A56120-K0R (optional) - GRAID SupremeRAID Core Software Module License (optional) a) SupremeRAID License: 25FC1-SR1000-AFS (4-native NVMe RAID)
Expansion Slots	2 x PCIe x16 slots (Gen4 x16), FHHL 1 x OCP 3.0 slot (Gen4 x16) - Supported NCSI function 1 x OCP 2.0 mezzanine slot (Gen3 x8) - Supported NCSI function		
I/O Ports	Front: 2 x USB 3.0 Rear: 2 x USB 3.0, 1 x VGA, 1 x MLAN Internal: 2 x SATA 7-pin ports, 1 x TPM header, 1 x VROC connector		



Learn more at <https://www.GIGABYTE.com/enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.
* Intel, the Intel logo, Xeon, and other Intel marks are trademarks of Intel Corporation or its subsidiaries.
* All other brands, logos and names are property of their respective owners.

© 2024 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

