


R283-S98-AAE2

Rack Server - 2U DP 24+2-Bay Gen5 NVMe/SATA/SAS4 with expander

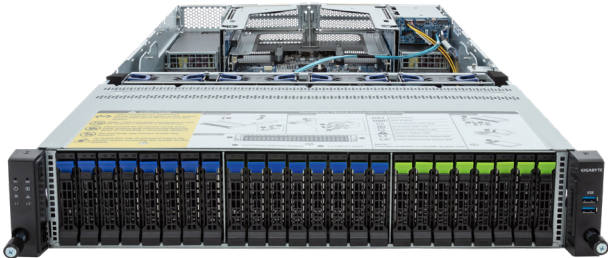

Features

- 4th/5th Gen Intel® Xeon® Scalable Processors
- Intel® Xeon® CPU Max Series
- Dual processor, LGA 4677
- 8-Channel RDIMM DDR5 per processor, 32 x DIMMs
- Dual ROM Architecture
- 2 x 1Gb/s LAN and 1 x MLAN ports
- 8 x 2.5" Gen5 NVMe/SATA/SAS4 hot-swappable bays
- 16 x 2.5" SATA/SAS4 hot-swappable bays
- 2 x 2.5" SATA/SAS4 hot-swappable bays on rear side
- Onboard 24Gb/s SAS4 expander
- 4 x FHHL PCIe Gen5 x16 slots
- 2 x OCP 3.0 Gen5 x16 slots
- 1+1 2000W 80 PLUS Platinum redundant power supplies

Specification

| | | | |
|------------------------|---|-----------------------------|---|
| Dimensions | 2U (W438 x H87.5 x D815 mm) | Backplane Board | Front - CBP20G0: PCIe Gen5 x4 or SATA 6Gb/s or SAS4 24Gb/s CBP20B1: PCIe Gen5 x4 or SATA 6Gb/s or SAS4 24Gb/s Rear - CBP2025: SATA 6Gb/s or SAS4 24Gb/s |
| Motherboard | MS93-FS0 | TPM | 1 x TPM header with SPI interface Optional TPM2.0 kit: CTM010 |
| CPU | 4th/5th Generation Intel® Xeon® Scalable Processors Intel® Xeon® CPU Max Series Dual processor, CPU TDP up to 350W 2 x LGA4677 Socket E | Power Supply | 1+1 2000W 80 PLUS Platinum redundant power supplies AC Input: 100-240V |
| Chipset | Intel® C741 Chipset | System Management | Aspeed® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X) |
| Memory | 8-Channel DDR5 memory, 32 x DIMM slots RDIMM modules up to 96GB supported 3DS RDIMM modules up to 256GB supported Up to 5600MHz (1DPC), 4400MHz (2DPC) | OS Compatibility | Windows Server 2019 / 2022 RHEL 8.6 / 8.7 / 9.0 / 9.1 / 9.2 (x64) SLES 15 SP4 (x64) Ubuntu 20.04.6 / 22.04 / 22.04.1 / 22.04.2 / 22.04.3 LTS (x64) VMware ESXi 7.0 Update 3i / 8.0 / 8.0 Update 1 Citrix Hypervisor 8.2 LTSR CU1 |
| LAN | 2 x 1Gb/s LAN ports (1 x Intel® I350-AM2) - Support NCSI function 1 x 10/100/1000 management LAN | System Fans | 4 x 80x80x38mm (18,300rpm) |
| Video | Integrated in Aspeed AST2600 2D Video Graphic Adapter with PCIe bus interface 1920x1200 @60Hz 32bpp, DDR4 SDRAM | Operating Properties | Operating temperature: 10°C to 35°C Operating humidity: 8-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing) |
| Storage | Front side: 8 x 2.5" Gen5 NVMe/SATA/SAS4 hot-swappable bays 16 x 2.5" SATA/SAS4 hot-swappable bays Rear side: 2 x 2.5" SATA/SAS4 hot-swappable bays Broadcom SAS4x32 expander SAS card is required for SAS devices support All devices are connected to SAS expander | Packaging Content | 1 x R283-S98, 2 x CPU heatsinks, 1 x Mini-DP to D-Sub cable, 6 x Carrier clips, 1 x 2-Section Rail kit |
| Expansion Slots | 4 x FHHL PCIe Gen5 x16 slots 2 x OCP 3.0 Gen5 x16 slots | Part Numbers | Barebone package (4th/5th Gen): 6NR283S98DR000ABE2* Barebone package (4th Gen): 6NR283S98DR000AAE2* - Motherboard: 9AS93FS0UR-000 - 2-Section Rail kit (CMA not supported): 25HB2-3A0206-K0R - CPU heatsink: 25ST1-323208-A0R - Mini-DP to D-Sub cable: 25CRN-200801-K1R - Power supply: 25EP0-22000A-L0S |
| Front I/O | 2 x USB 3.2 Gen1 | | |
| Rear I/O | 2 x USB 3.2 Gen1, 1 x Mini-DP, 2 x RJ45, 1 x MLAN | | |



Learn more about GIGABYTE server, visit <https://www.gigacomputing.com>

Designed by



* All specifications are subject to change without notice. Please visit our website for the latest information.
* Intel, the Intel logo, Xeon, and other Intel marks are trademarks of Intel Corporation or its subsidiaries.
* All other brands, logos and names are property of their respective owners.

© 2023 Giga Computing Technology Co., Ltd. All rights reserved.