




GIGABYTE BRIX PRO 3.5" SBC Commercial PC BSi7-1165G7 / BSi5-1135G7 / BSi3-1115G4

Product Feature

4 x HDMI 2 x LAN 2 x M.2

- Intel® 11th Gen Core™ Processor (Tiger Lake UP3)
- New Intel® X^e Graphic (Core i7/ i5 only)
- Dual Channel DDR4, 2 x SO-DIMMs 3200MHz, Max. 64GB
- 4 x HDMI port, supporting a maximum resolution 4K/60P
- 1 x Thunderbolt 4 Port
- Intel® AX201 Wifi 6 + BT5.1
- Intel® 2.5G + Gigabit Ethernet (225V+219V)
- ALC255 Audio Codec
- 2 x M.2 for SSD (1 x PCIe Gen 4 x4 + 1 x PCIe x4 / SATA Mode)
- Infineon TPM onboard
- 4 x USB 3.2 (Front), 2 x USB 3.2 (Back)
- Headphone/microphone jack
- Support VESA Mount

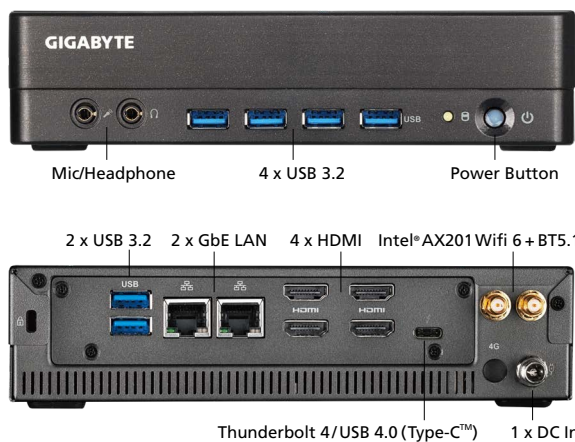

Spec

CPU	BSi7-1165G7 / Intel® Core i7-1165G7, 4 Cores/8 Threads, 12M Cache, 1.2-4.8GHz, 28W
	BSi5-1135G7 / Intel® Core i5-1135G7, 4 Cores/8 Threads, 8M Cache, 0.9-4.2GHz, 28W
	BSi3-1115G4 / Intel® Core i3-1115G4, 2 Cores/4 Threads, 6M Cache, 1.7-4.1GHz, 28W
Graphic	BSi7-1165G7 / Intel® Iris X ^e graphic with 96EU 1.3GHz
	BSi5-1135G7 / Intel® Iris X ^e graphic with 80EU 1.3GHz
	BSi3-1115G4 / Intel® UHD graphic with 48EU 1.25GHz
Memory	2 x SO-DIMM DDR4 3200MHz, Max. 64GB
	Dual channel memory architecture
Storage	1 x M.2 PCIe Gen4 x4
	1 x M.2 PCIe x4/SATA Mode
	1 x SATA III 6Gb/s Port
LAN	Intel® 219V + 225V (GbE+2.5G)
Wireless	Intel® AX201 Wi-Fi 6 + BT5.1
Graphic Output	4 x HDMI 2.0a @4K/60P
AUDIO	ALC255 Codec
USB / COM port	4 x USB 3.2 (Front), 2 x USB 3.2 (Back)
Adapter	Input : 100-240V
	Output : 7.1A/19V, 135W
Dimension	196.2 x 44.4 x 140 mm, 1.16L