



Cable Arm Installation Guide

Before the installation, make sure the Cable Management Arm (CMA) installation direction and switch the CMA connector

1. Press **Push Button**.
2. Spin 180 degree to change the direction.




Basket size:

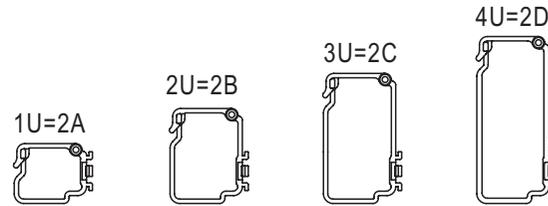


Cable Management Arm Installation


1. Install the inner member.
Install (A) to (B).

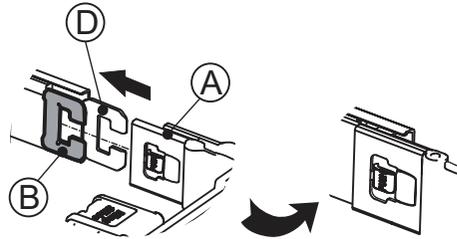

2. Install the inner member.
Install (C) to (D).

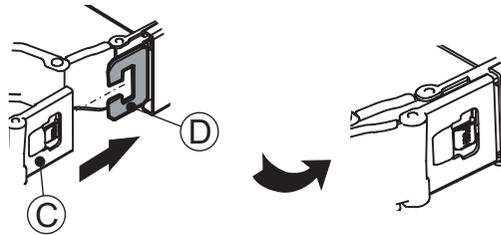


3. Install the outer member
Install (E) to (F).

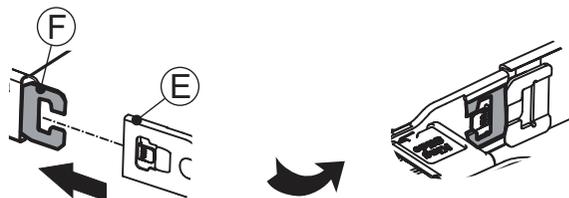

Cable Management Arm Removal


Release the outer member

1. Press the **PUSH** button on the CMA plug-in part to draw it out.

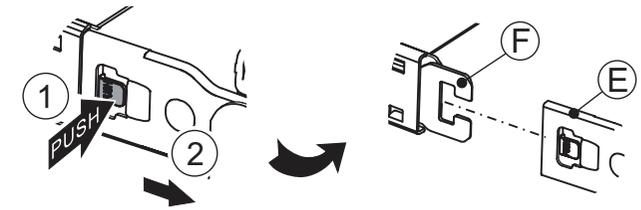



Release the outer member

1. Turn CMA 90 degree to the right hand side to maintain the chassis or resume the removal.
2. Press **PUSH** button on the CMA plug-in part to draw it out. or resume the removal.

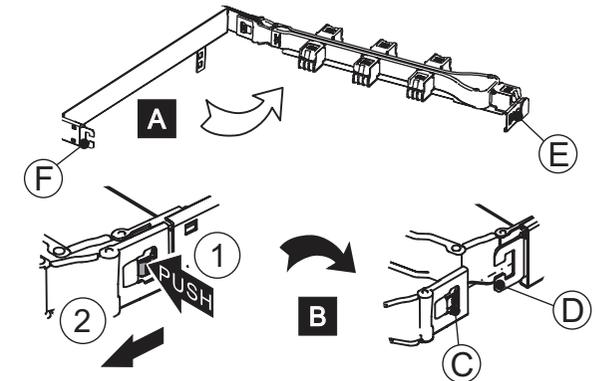


Release the inner member

1. Press **PUSH** button on the CMA plug-in part to draw it out.

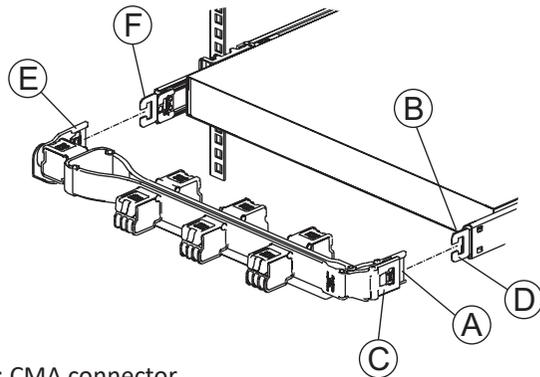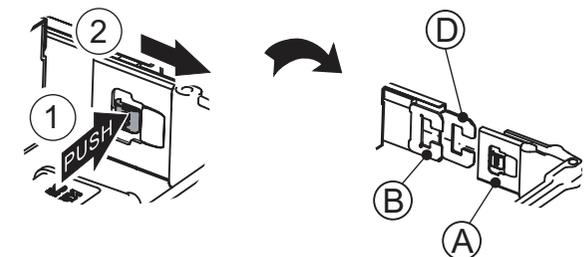

- A : CMA connector
- B : CMA connector based on inner member
- C : CMA connector
- D : CMA connector based on outer member
- E : CMA connector beside the center CMA body
- F : CMA connector base on outer member

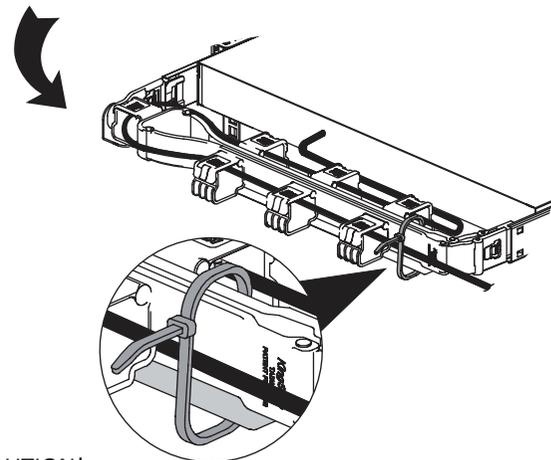

CAUTION!
Loop strap must be tied to the CMA crossbar. This is transportation accessory. Remove the loop strap after the system arrives at the final destination.