



Hardware Quick Installation Guide


Motherboard Components

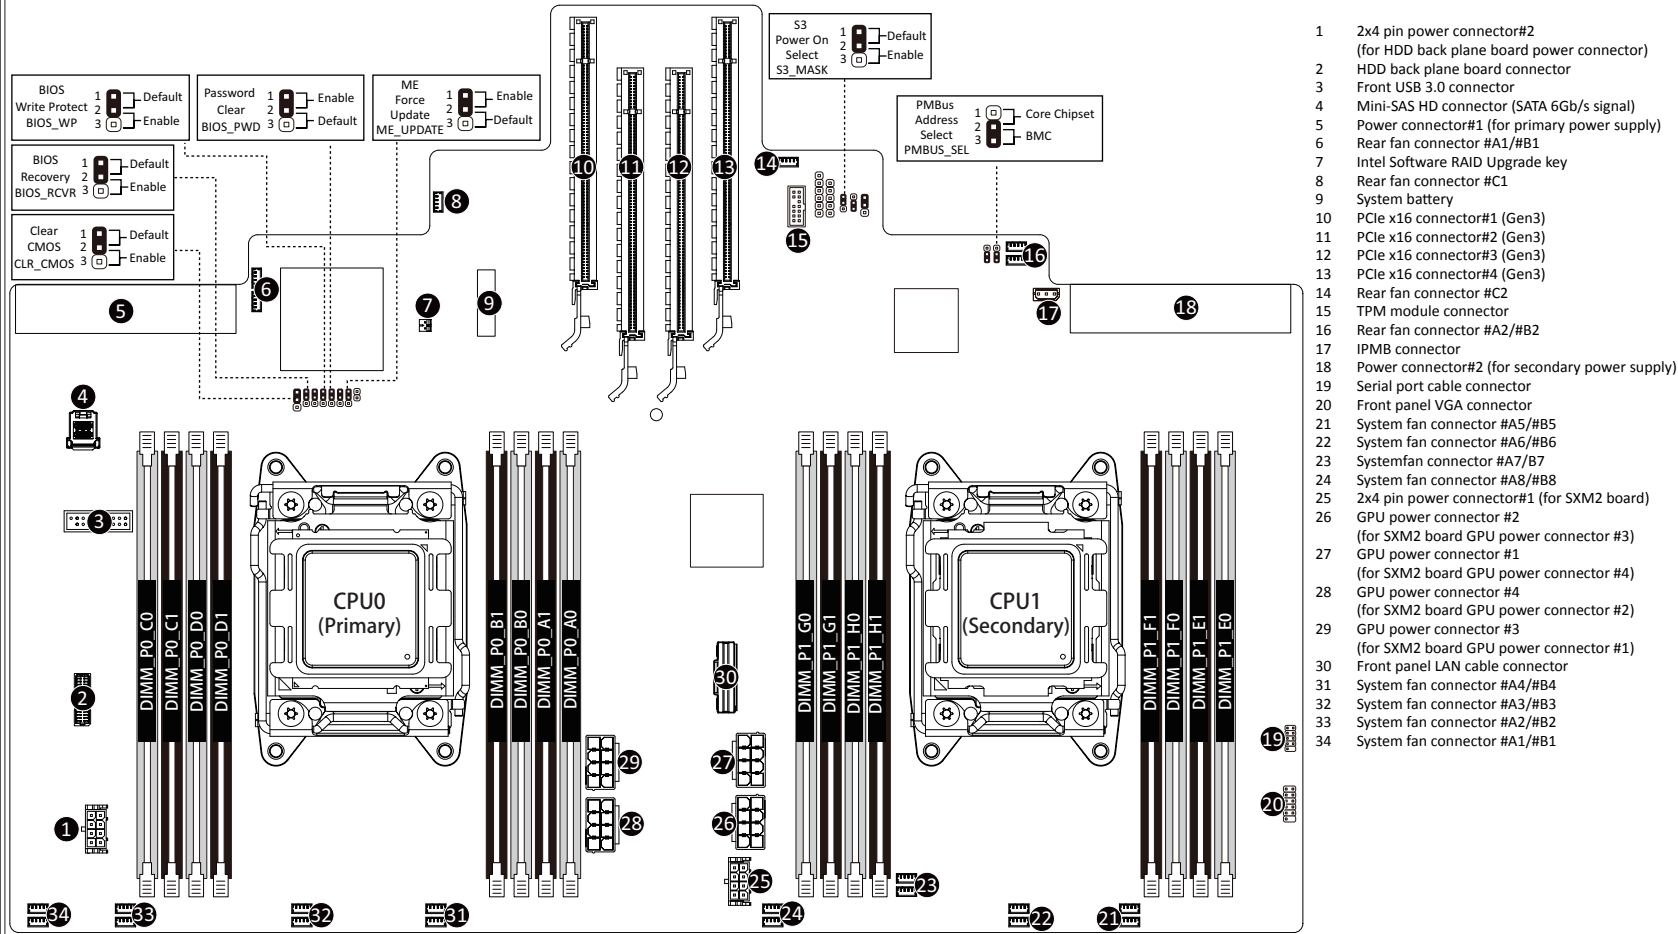


Fan Duct



Riser/PCIe






PCIe x16 MD2 Card (from PLX8796 downstream)




PCIe x16 MD2 Card (from CPU0)

SXM2

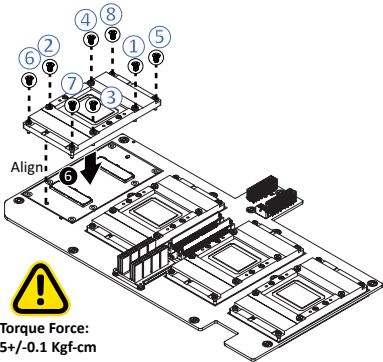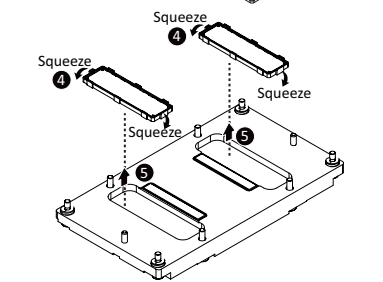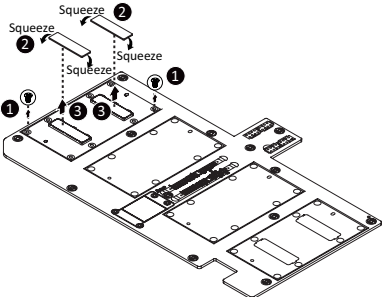


Torque Force:
5+/-0.1 Kgf-cm

System Components

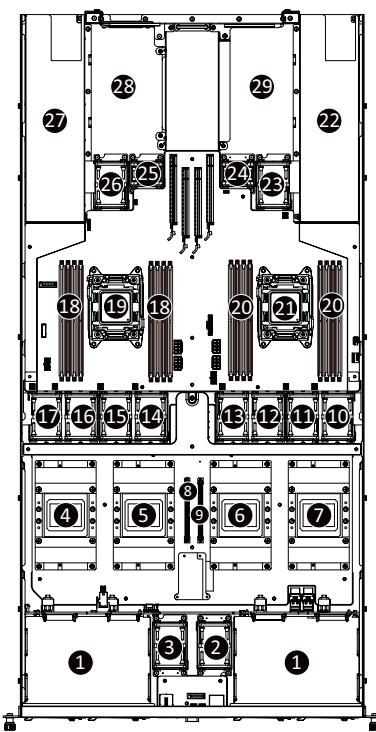



- Hard Drive Cage
- System fan #1
- System fan #2
- SXM2 #2
- SXM2 #0
- SXM2 #1
- SXM2 #3
- PCIe Slot #1 (connects to motherboard PCIe x16 connector#2)
- PCIe Slot #2
- System middle fan #5
- System middle fan #6
- System middle fan #7
- System middle fan #8
- System middle fan #4
- System middle fan #3
- System middle fan #2
- System middle fan #1
- Primary CPU DIMMs
- Primary CPU
- Secondary CPU DIMMs
- Secondary CPU
- Secondary power supply
- System middle fan #1
- System middle fan #2
- System middle fan #3
- System middle fan #4
- Primary power supply
- Riser connector #1 (PCIE_1/from motherboard)
- Riser connector #2 (PCIE_2/from SXM2 board)

Memory



Type	Ranks Per DIMM and Data Width	Speed (MT/s); Slot Per Channel (SPC) and DIMM Per Channel (DPC)		
		1 Slot Per Channel	2 Slot Per Channel	2DPC
RDIMM	SRx4	2400	2400	2133
RDIMM	SRx8	2400	2400	2133
RDIMM	DRx8	2400	2400	2133
RDIMM	DRx4	2400	2400	2133
LRDIMM	QRx4	2400	2400	2400
LRDIMM 3DS	8Rx4	2400	2400	2400

Heat Sink

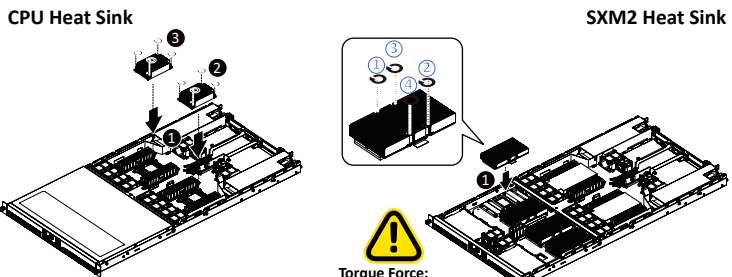


CPU Heat Sink

SXM2 Heat Sink

Torque Force:
4.5+/-0.5 Kgf-cm

CPU



DDR4 2400MHz is only available on Intel Xeon®E5-2600 V4 processor.