


GIGABYTE






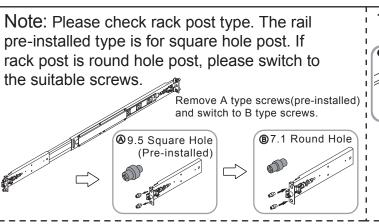

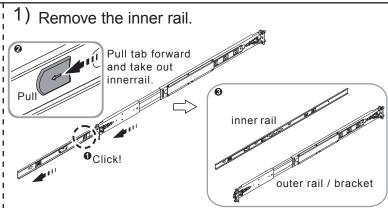

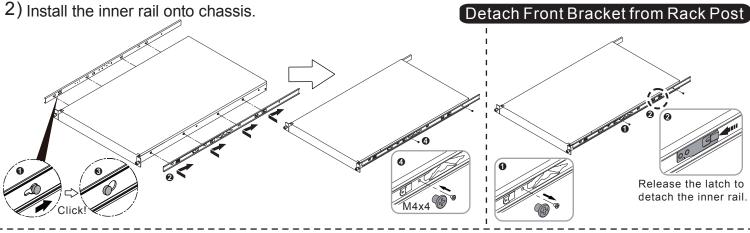


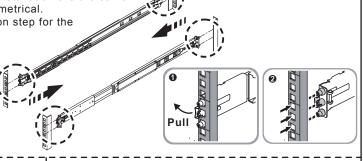

Detach Front Bracket from Rack Post

4) Insert chassis to complete the installation.

- Ensure ball bearing retainer is located at the front of the rail.
- 2. Insert the chassis into outer rails.
- 1. When hit a stop, please pull / push the release tab on the inner rails.
- 4.6. Tighten chassis with shipping screws.

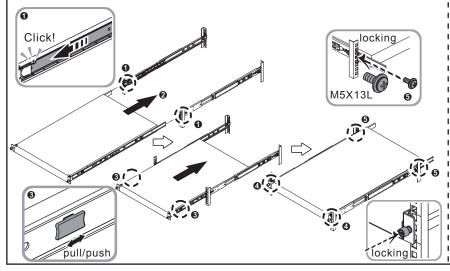

Detach Front Bracket from Rack Post

- 1. Loosen shipping screw to pull out chassis.
- 2. Press the disconnect tab forward to remove chassis.

