

SOP for OCP LAN solution with NCSI support:


Supported OCP LAN card model name:

CLNO832: 10G SFP+ Intel 82599

CLNO222: 10G BaseT Intel X550

Step-by-step configuration:

1. Enable onboard NCSI Switch jumper

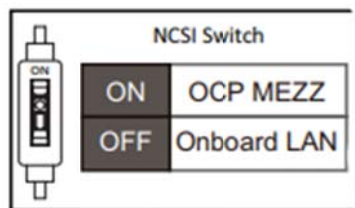

2. Install OCP card
 3. Change setting in BIOS or WebUI BMC configuration to NCSI / Share NIC
 4. Install management LAN cable to OCP LAN port 0
 5. Save setting and power cycle server
 6. Start BMC management share NIC support from OCP LAN port 0
- Note limitation, if you switch over to OCP, original onboard NCSI no longer supported