


EC update instructions


1. Click ECWinFlash.


Name	Date modified	Type	Size
clean	10/27/2022 9:10 PM	Application	8 KB
clean	10/27/2022 9:10 PM	Configuration setti...	1 KB
EcFlash	6/15/2023 9:06 AM	Windows Batch File	1 KB
KBC ECWinFlash	10/27/2022 9:10 PM	Application	1,689 KB
io.dll	10/27/2022 9:10 PM	Application extens...	85 KB
NPxxRNx-Y.09	6/15/2023 9:06 AM	09 File	128 KB

2. Make sure AC/DC Adapter is plugged-in (AC Mode) before updating the EC.

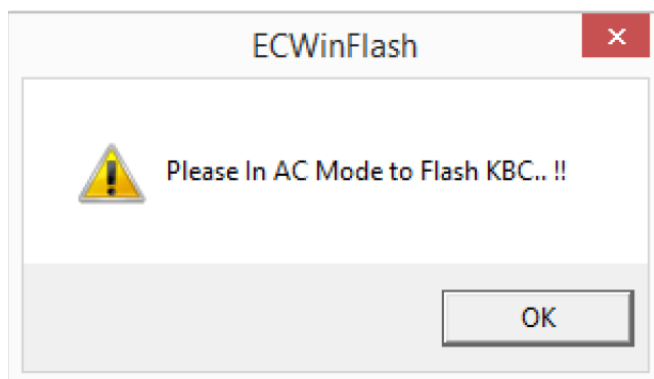


3. The system will prompt a warning message prompting you close all the other applications before continuing to run the ECWinFlash. It will also prompt for the corresponding EC size, 64K or 128K.

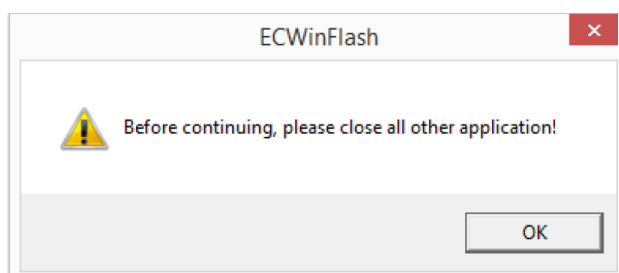


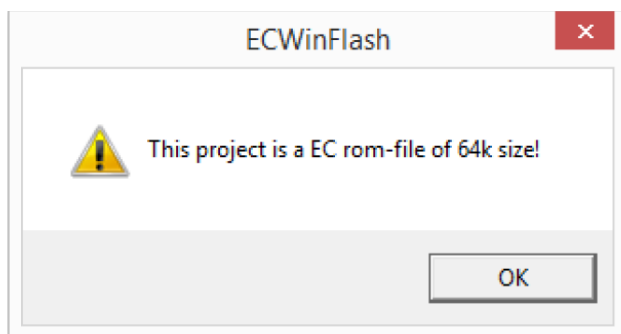


4. After pressing the ok button, ECWinFlash window will appear.
5. Click **...button**.

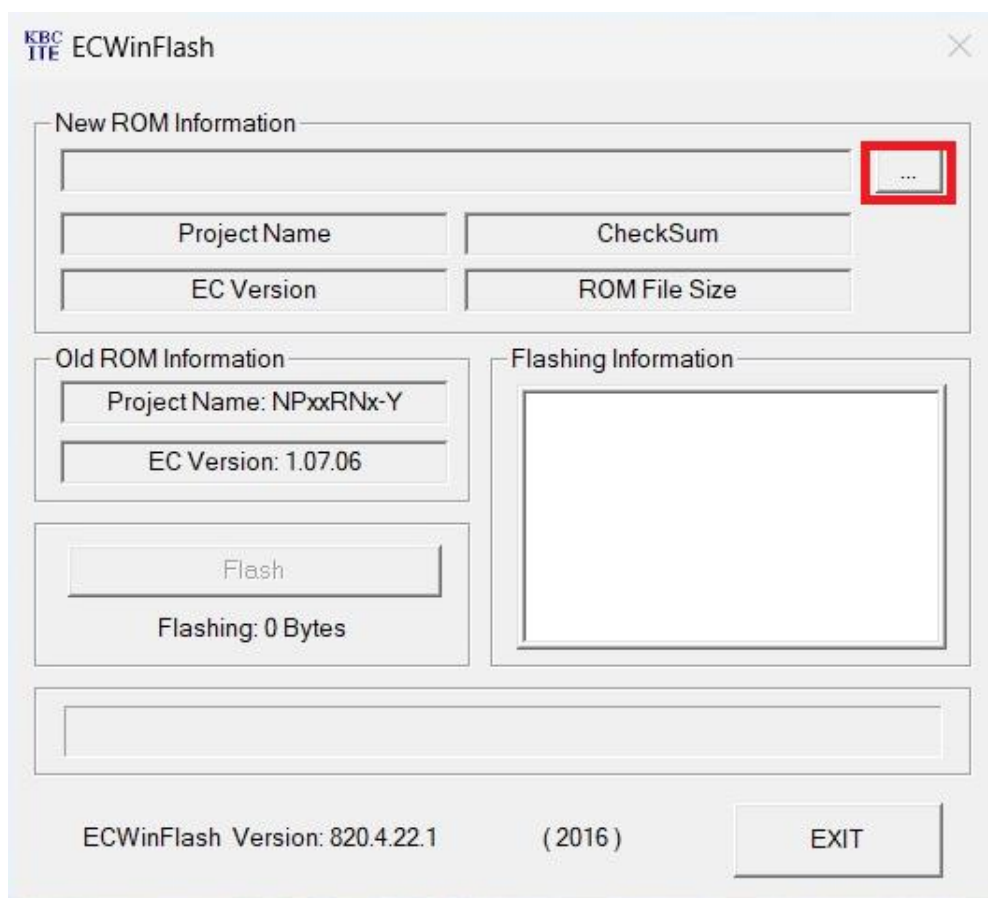


6. Select EC file.

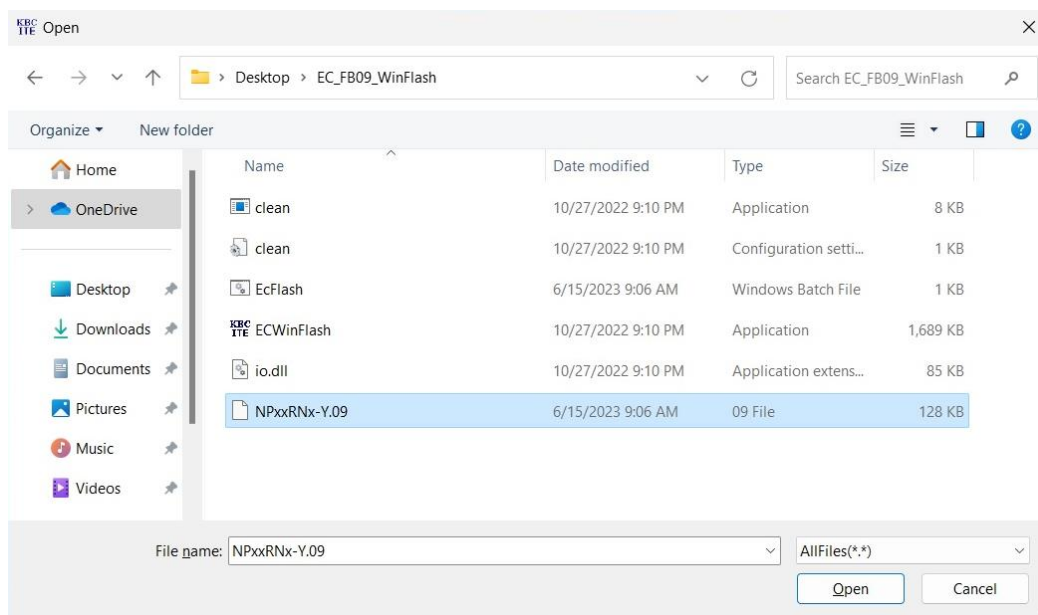

7. Click the **Flash** button to update EC.

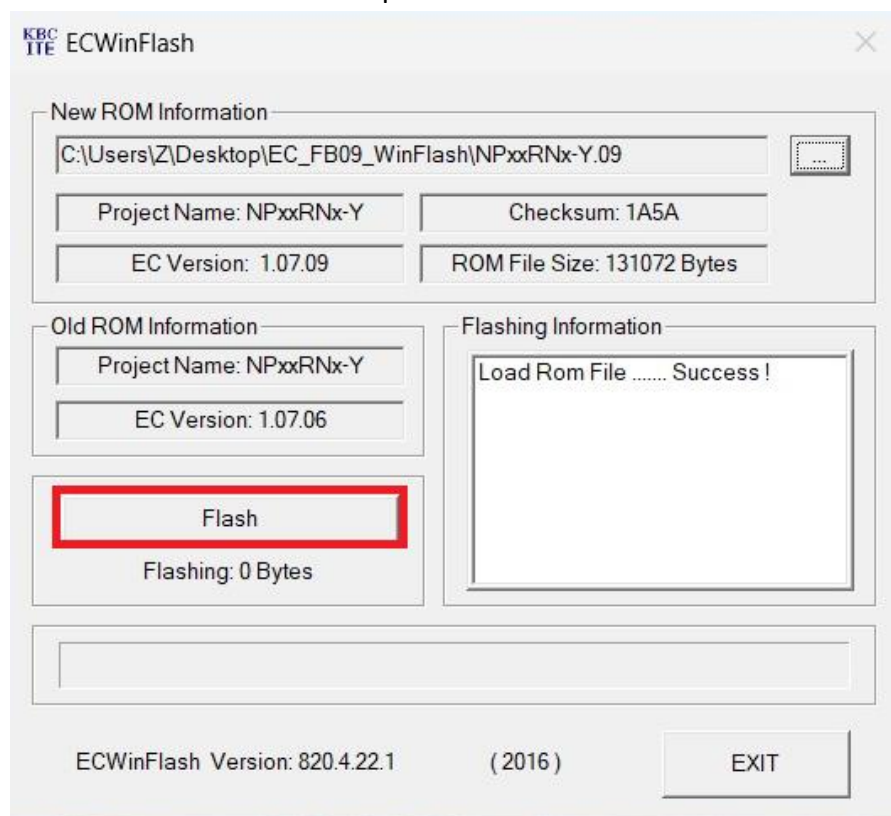

8. When the process is completed, the system will prompt a warning message, and automatically shut down after pressing the OK button.

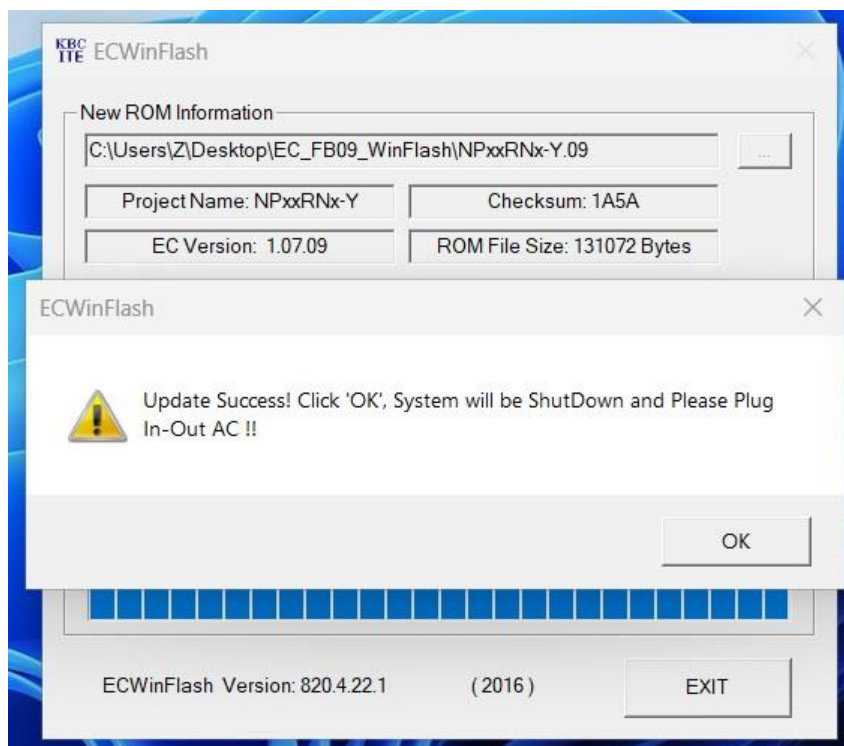

9. After shutdown, please re-plug the AC/DC adapter and reboot to complete the EC update process.