


# G593-ZD1-LAX3 (Rev. 3.x)

HPC/AI Server - AMD EPYC™ 9005/9004 -  
5U DP NVIDIA HGX™ H200 DLC

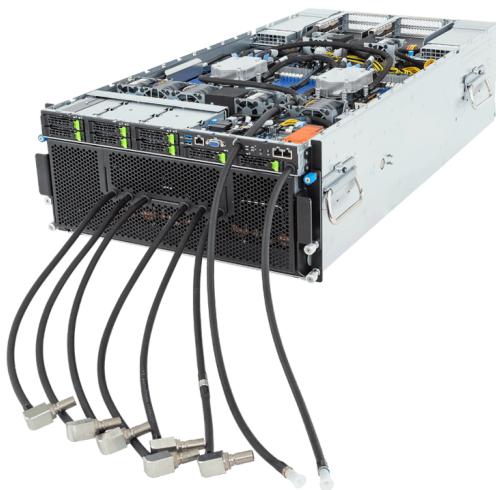

## Key Features

- Liquid-cooled NVIDIA HGX™ H200
- CPU+GPU direct liquid cooling solution
- 900GB/s GPU-to-GPU bandwidth with NVIDIA NVLink™ and NVSwitch™
- Dual AMD EPYC™ 9005/9004 Series Processors
- 12-Channel DDR5 RDIMM, 24 x DIMMs
- 2 x 10Gb/s LAN ports via Intel® X710-AT2
- 2 x M.2 slots with PCIe Gen3 x4 and x1 interface
- 8 x 2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 4 x FHHL PCIe Gen5 x16 slots
- 8 x LP PCIe Gen5 x16 slots
- 4+2 3000W 80 PLUS Titanium redundant power supplies

## Specification

Dimensions	5U (W447 x H219.7 x D945 mm)	Modular GPU	Liquid-cooled NVIDIA HGX™ H200 with 8 x SXM GPUs
Motherboard	MZB3-G43	PCIe Expansion Slots	4 x FHHL PCIe Gen5 x16 8 x LP PCIe Gen5 x16  *The ambient temperature is limited to 25°C when NVIDIA® BlueField®-3 DPUs/SuperNIC™ are installed.
CPU	AMD EPYC™ 9005 Series Processors AMD EPYC™ 9004 Series Processors Dual processor, cTDP up to 500W	I/O Ports	<b>Front:</b> 2 x USB 3.2 Gen1, 1 x VGA, 2 x RJ45, 1 x MLAN (default) <b>Rear:</b> 1 x MLAN
OS Compatibility	<a href="#">OS Support List</a>	Backplane Board	PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
Socket	2 x LGA 6096 (Socket SP5)	TPM	1 x TPM header (SPI), Optional TPM2.0 kit: CTM010
Chipset	System on Chip	Power Supply	4+2 3000W 80 PLUS Titanium redundant power supplies AC Input: 115-240V  *The system power supply requires C19 power cord.
Memory	12-Channel DDR5 RDIMM, 24 x DIMMs [EPYC 9005] Up to 6400 MT/s [EPYC 9004] Up to 4800 MT/s	System Fans	Motherboard: 2 x 40x40x56mm / 3 x 60x60x56mm PCIe slots: 4 x 40x40x28mm / 2 x 40x40x56mm GPU tray: 4 x 80x80x80mm
LAN	<b>Front:</b> 2 x 10Gb/s LAN (1 x Intel® X710-AT2), Support NCSI 1 x 10/100/1000 Mbps Management LAN <b>Rear:</b> 1 x 10/100/1000 Mbps Management LAN	Operating Properties	Operating: 10°C to 35°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)  *To ensure system stability and prevent condensation, when the relative humidity exceeds 50%, the coolant inlet temperature must be higher than the dry-bulb temperature and it should not exceed 45°C.
Video	Integrated in ASPEED® AST2600 - 1 x VGA port	Packaging Content	1 x G593-ZD1-LAX3 1 x L-shape Rail kit
Storage	<b>Front hot-swap:</b> 8 x 2.5" Gen5 NVMe/SATA/SAS-4 <sup>[1]</sup> <b>Internal M.2:</b> 1 x M.2 (2280/22110), PCIe Gen3 x4 1 x M.2 (2280/22110), PCIe Gen3 x1  [1] Storage card is required to support SATA and SAS drives.	Ordering Part Numbers	6NG593ZD1DR000LCX3*
RAID	Require RAID add-in cards		



Learn more at: <https://www.gigabyte.com/Enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.

\* All trademarks and logos are the properties of their respective holders.

© 2026 Giga Computing Technology Co., Ltd. All rights reserved.

Last updated: Jan 27, 2026

Designed by

