


# E164-S30-AAG1

Edge Server - 1U UP 2-Bay Gen5 NVMe/SATA/SAS-4

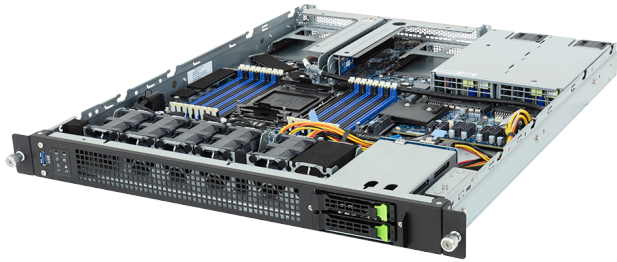

## Key Features

- Single Intel® Xeon® 6 Processors, LGA 4710
- 8-Channel DDR5 RDIMM / MRDIMM, 16 x DIMMs
- Dual ROM Architecture
- 1 x 1Gb/s LAN port via Intel® I210-AT
- 2 x 2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 1 x M.2 slot with PCIe Gen5 x2 interface
- 1 x M.2 slot with PCIe Gen5 x2 interface, **shared with SATA**
- 2 x FHHL PCIe Gen5 x16 slots
- 2 x OCP NIC 3.0 PCIe Gen5 x16 slots
- Dual 800W 80 PLUS Titanium redundant power supply

## Applications

Networks Server, Servers for Hybrid/Private Cloud, Edge Server...

## Specification

Dimensions	1U (W438 x H43.5 x D520 mm)	PCIe Expansion Slots	2 x FHHL PCIe Gen5 x16 2 x OCP NIC 3.0 PCIe Gen5 x16, Support NCSI
Motherboard	MS34-DC0	I/O Ports	<b>Front:</b> 1 x USB 3.2 Gen1 <b>Rear:</b> 2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x RJ45, 1 x MLAN
CPU	Intel® Xeon® 6 Processors - Intel® Xeon® 6700-Series Processors - Intel® Xeon® 6500-Series Processors Single processor, TDP up to 350W	Backplane Board	PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
OS Compatibility	<a href="#">OS Support List</a>	TPM	1 x TPM header (SPI), Optional TPM2.0 kit: CTM012 1 x PProT connector (only enabled on RoT SKU)
Socket	1 x LGA 4710 (Socket E2)	Power Supply	Dual 800W 80 PLUS Titanium redundant power supply AC Input: 100-240V
Chipset	System on Chip	System Management	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
Memory	8-Channel DDR5 RDIMM / MRDIMM, 16 x DIMMs [RDIMM] Up to 6400 MT/s (1DPC), 5200 MT/s (2DPC) [MRDIMM] Up to 8000 MT/s [1] [1] MRDIMMs are only supported with Intel® Xeon® 6 Processors with P-cores and in a 1DPC configuration.	System Fans	5 x 40x40x56mm (32,000rpm)
LAN	1 x 1Gb/s LAN (1 x Intel® I210-AT), Support NCSI 1 x 10/100/1000 Mbps Management LAN	Operating Properties	Operating: 10°C~35°C, 8%~80% (non-condensing) Non-operating: -40°C~60°C, 20%~95% (non-condensing)
Video	Integrated in ASPEED® AST2600 - 1 x Mini-DP	Packaging Content	1 x E164-S30-AAG1 1 x CPU heatsink 1 x Mini-DP to D-Sub cable 2 x Carriers
Storage	<b>Front hot-swap:</b> 2 x 2.5" Gen5 NVMe/SATA/SAS-4 [1] <b>Internal M.2:</b> 1 x M.2 (2280/22110), PCIe Gen5 x2 1 x M.2 (2280/22110), PCIe Gen5 x2, <b>shared with SATA</b> [1] SAS card is required to support SAS drives.	Ordering Part Numbers	6NE164S30DR000AAG1*
RAID	Require RAID add-in cards Onboard VROC key header	Optional Parts	- 2-Section Rail kit (385-480mm): 25HB2-3A0204-K0R ( <b>MOQ: 500</b> ) - 2-Section Rail kit (660-840mm): 25HB2-3A0203-K0R



Learn more at: <https://www.gigabyte.com/Enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.  
\* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

