


G294-A22-AAP2

HPC/AI Server - 2U UP 8 x PCIe Gen5 GPUs

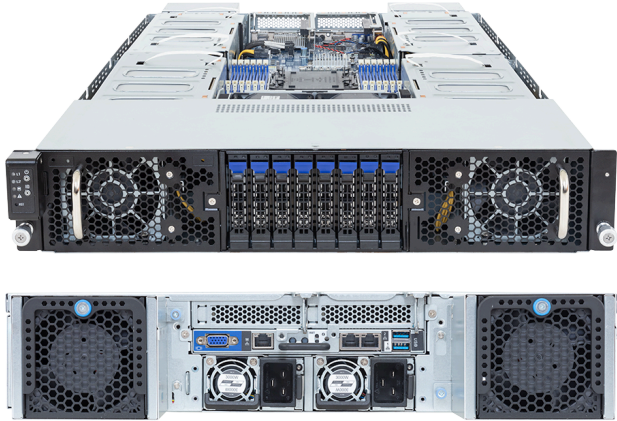

Key Features

- Supports up to 8 x Dual slot Gen5 GPUs
- Supports 4 x NVIDIA H200 NVL PCIe GPUs with 2-way NVLink bridges
- Single Intel® Xeon® 6900-Series Processors
- 12-Channel DDR5 RDIMM / MRDIMM, 12 x DIMMs
- Dual ROM Architecture
- 2 x 10Gb/s LAN ports via Intel® X710-AT2
- 8 x 2.5" SATA/SAS-4 hot-swap bays
- 8 x FHFL PCIe Gen5 x16 slots for GPUs
- 2 x LP PCIe Gen5 x16 slots for add-in cards
- 2 x 3000W 80 PLUS Titanium redundant power supplies

Applications

AI Platform, AI Training Server, AI Inference Server, Visual Computing, High-Performance Computing Server...

Specification

Dimensions	2U (W448 x H87.5 x D850 mm)	PCIe Expansion Slots	8 x FHFL PCIe Gen5 x16, for GPUs 2 x LP PCIe Gen5 x16, for add-in cards <small>*The system supports 4 x NVIDIA H200 NVL PCIe GPUs at 25°C ambient, arranged as two 2-GPU sets, each with a 2-way NVLink bridge.</small>
Motherboard	MA24-G20	I/O Ports	Rear: 2 x USB 3.2 Gen1, 1 x VGA, 2 x RJ45, 1 x MLAN
CPU	Intel® Xeon® 6 Processors - Intel® Xeon® 6900-Series Processors Single processor, TDP up to 500W	Backplane Board	PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
OS Compatibility	OS Support List	TPM	1 x TPM header (SPI), Optional TPM2.0 kit: CTM012 1 x PPrOT connector (only enabled on RoT SKU)
Socket	1 x LGA 7529 (Socket BR)	Power Supply	2 x 3000W 80 PLUS Titanium redundant power supplies AC Input: 100-240V <small>*The system power supply requires C19 power cord.</small>
Chipset	System on Chip	System Management	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
Memory	12-Channel DDR5 RDIMM/MRDIMM, 12 x DIMMs [RDIMM] Up to 6400 MT/s [MRDIMM] Up to 8800 MT/s ^[1] ^[1] MRDIMMs are only supported with Intel® Xeon® 6 Processors with P-cores.	System Fans	6 x 80x80x80mm (17,500rpm/15,000rpm) 2 x 80x80x80mm (18,700rpm/15,100rpm)
LAN	2 x 10Gb/s LAN (1 x Intel® X710-AT2), Support NCSI 1 x 10/100/1000 Mbps Management LAN	Operating Properties	Operating: 10°C to 30°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)
Video	Integrated in ASPEED® AST2600 - 1 x VGA port	Packaging Content	1 x G294-A22-AAP2 1 x CPU heatsink 4 x GPU power cables (12VHPWR, 250mm) 4 x GPU power cables (12VHPWR, 280mm) 1 x Carrier 1 x L-shape Rail kit
Storage	Front hot-swap: 8 x 2.5" SATA/SAS-4 ^{[1][2]} Internal M.2: 2 x M.2 (2280), PCIe Gen4 x4, occupied for SATA ^[1] SAS card is required to support SAS drives. ^[2] The system supports up to 2 x Gen5 NVMe drives with optional cables.	Ordering Part Numbers	6NG294A22DR000AAP2*
RAID	Require RAID add-in cards Onboard VROC key header		



Learn more at: <https://www.gigabyte.com/Enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.
* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

