


G593-SD0-LAX1

HPC/AI Server - 5U DP NVIDIA HGX™ H100 8-GPU 4-Root Port
DLC

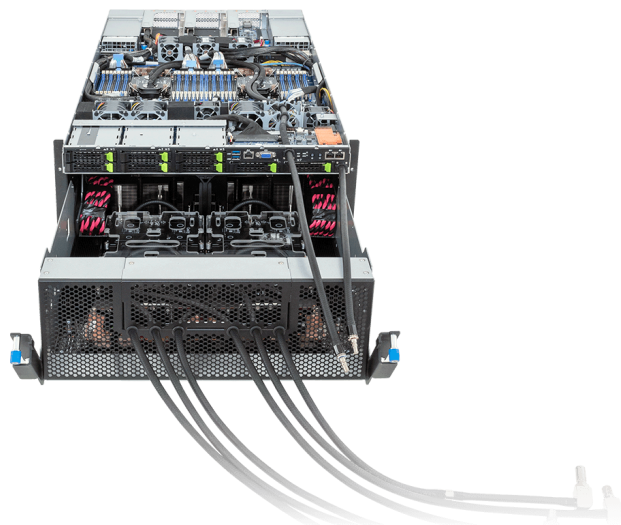

Key Features

- Liquid-cooled NVIDIA HGX™ H100 8-GPU
- CPU+GPU direct liquid cooling solution
- 900GB/s GPU-to-GPU bandwidth with NVIDIA NVLink™ and NVSwitch™
- Dual 5th/4th Gen Intel® Xeon® Scalable Processors
- Dual Intel® Xeon® CPU Max Series
- 8-Channel DDR5 RDIMM, 32 x DIMMs
- Dual ROM Architecture
- Compatible with NVIDIA® BlueField®-2 DPUs
- 2 x 10Gb/s LAN ports via Intel® X710-AT2
- 8 x 2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 12 x LP PCIe Gen5 x16 slots
- 1 x LP PCIe Gen4 x16 slot
- 4+2 3000W 80 PLUS Titanium redundant power supplies

Specification

Dimensions	5U (W447 x H219.7 x D945 mm)	Modular GPU	Liquid-cooled NVIDIA HGX™ H100 with 8 x SXM5 GPUs
Motherboard	MSB3-G40	PCIe Expansion Slots	12 x LP PCIe Gen5 x16 1 x LP PCIe Gen4 x16
CPU	5th Generation Intel® Xeon® Scalable Processors 4th Generation Intel® Xeon® Scalable Processors Intel® Xeon® CPU Max Series Dual processor, TDP up to 350W	I/O Ports	Front: 2 x USB 3.2 Gen1, 1 x VGA, 2 x RJ45, 1 x MLAN (default) Rear: 1 x MLAN
OS Compatibility	OS Support List	Backplane Board	PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
Socket	2 x LGA 4677 (Socket E)	TPM	1 x TPM header (SPI), Optional TPM2.0 kit: CTM010
Chipset	Intel® C741	Power Supply	4+2 3000W 80 PLUS Titanium redundant power supplies AC Input: 115-240V *The system power supply requires C19 power cord.
Memory	8-Channel DDR5 RDIMM, 32 x DIMMs [5th Gen Intel Xeon] Up to 5600 MT/s (1DPC), 4400 MT/s (2DPC) [4th Gen Intel Xeon] Up to 4800 MT/s (1DPC), 4400 MT/s (2DPC) [Intel Xeon Max Series] Up to 4800 MT/s (1DPC), 4400 MT/s (2DPC)	System Management	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
LAN	Front: 2 x 10Gb/s LAN (1 x Intel® X710-AT2), Support NCSI 1 x 10/100/1000 Mbps Management LAN Rear: 1 x 10/100/1000 Mbps Management LAN	System Fans	Motherboard: 2 x 40x40x28mm 3 x 60x60x56mm PCIe slots: 4 x 40x40x28mm 3 x 40x40x56mm GPU tray: 4 x 80x80x80mm
Video	Integrated in ASPEED® AST2600 - 1 x VGA port	Operating Properties	Operating: 10°C to 35°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)
Storage	Front hot-swap: 8 x 2.5" Gen5 NVMe/SATA/SAS-4 ^[1] ^[1] SAS card is required to support SAS drives.	Packaging Content	1 x G593-SD0-LAX1 6 x Carriers 1 x L-shape Rail kit
RAID	Intel® SATA RAID 0/1/10/5 Support optional RAID add-in cards	Ordering Part Numbers	6NG593SD0DR000LBX1*



Learn more at: <https://www.gigabyte.com/Enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.
* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

