


# R163-Z35-AAH1

Rack Server - 1U UP 12-Bay Gen5 NVMe/SATA/SAS-4 Titanium

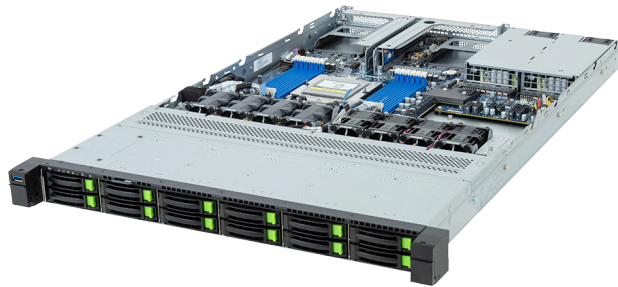

## Key Features

- Single AMD EPYC™ 9004 Series Processors
- 12-Channel DDR5 RDIMM, 12 x DIMMs
- Dual ROM Architecture
- 1 x 1Gb/s LAN port via Intel® I210-AT
- 12 x 2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 1 x M.2 slot with PCIe Gen3 x4 interface
- 2 x FHHL PCIe Gen5 x16 slots
- 2 x OCP NIC 3.0 PCIe Gen5 x16 slots
- Compatible with SupremeRAID™ by Graid Technology
- 1+1 1300W 80 PLUS Titanium redundant power supplies

## Applications

Networks Server, Servers for Hybrid/Private Cloud...

## Specification

Dimensions	1U (W438 x H43.5 x D710 mm)	PCIe Expansion Slots	2 x FHHL PCIe Gen5 x16 2 x OCP NIC 3.0 PCIe Gen5 x16, Support NCSI
Motherboard	MZ33-DC1	I/O Ports	<b>Front:</b> 1 x USB 3.2 Gen1 <b>Rear:</b> 2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x RJ45, 1 x MLAN
CPU	AMD EPYC™ 9005 Series Processors AMD EPYC™ 9004 Series Processors Single processor, cTDP up to 300W <sup>[1]</sup> <sup>[1]</sup> cTDP supported up to 400W under limited thermal conditions.	Backplane Board	PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
OS Compatibility	<a href="#">OS Support List</a>	TPM	1 x TPM header (SPI), Optional TPM2.0 kit: CTM010
Socket	1 x LGA 6096 (Socket SP5)	Power Supply	1+1 1300W 80 PLUS Titanium redundant power supplies AC Input: 100-240V
Chipset	System on Chip	System Management	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
Memory	12-Channel DDR5 RDIMM, 12 x DIMMs Up to 4800 MT/s	System Fans	4 x 40x40x28mm (25,000rpm) 4 x 40x40x56mm (29,700rpm)
LAN	1 x 1Gb/s LAN (1 x Intel® I210-AT), Support NCSI 1 x 10/100/1000 Mbps Management LAN	Operating Properties	Operating: 10°C~35°C, 8%~80% (non-condensing) Non-operating: -40°C~60°C, 20%~95% (non-condensing)
Video	Integrated in ASPEED® AST2600 - 1 x Mini-DP	Packaging Content	1 x R163-Z35-AAH1 1 x CPU heatsink 1 x Mini-DP to D-Sub cable 1 x 2-Section Rail kit
Storage	<b>Front hot-swap:</b> 12 x 2.5" Gen5 NVMe/SATA/SAS-4 <sup>[1]</sup> <b>Internal M.2:</b> 1 x M.2 (2280/22110), PCIe Gen3 x4 <sup>[1]</sup> SAS card is required to support SAS drives.	Ordering Part Numbers	6NR163Z35DR000ABH1*
RAID	Require RAID add-in cards <b>Optional compatible RAID Cards:</b> NVMe/NVMe-oF RAID Cards with SupremeRAID™ by Graid Technology RAID Card models: SR-1000-FD32 Support RAID 0/1/5/6/10	Optional Parts	- RAID card (SR-1000-FD32): 25FC1-SRBUN0-AFS - 3-Section Rail kit (Supports CMA): 25HB2-A56120-K0R - Cable Management Arm: 25HBZ-R18100-K0R



Learn more at: <https://www.gigabyte.com/Enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.  
\* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

