


# R183-SF2-IAL1

Rack Server - 1U DP 4 x PCIe Gen5 GPUs Immersion

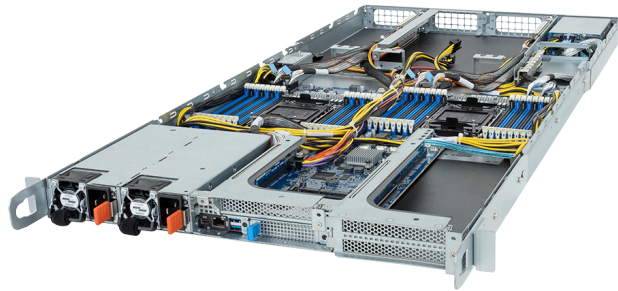

## Key Features

- Immersion Cooling Server
- Supports up to 4 x Dual slot Gen5 GPUs
- Dual 5th/4th Gen Intel® Xeon® Scalable Processors
- Dual Intel® Xeon® CPU Max Series
- 8-Channel DDR5 RDIMM, 32 x DIMMs
- Dual ROM Architecture
- 2 x 2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 4 x FHFL PCIe Gen5 x16 slots for GPUs
- 1 x FHFL PCIe Gen5 x16 slot
- 1 x FHHL PCIe Gen5 x16 slot
- 1 x **Internal** LP PCIe Gen4 x8 slot
- 1 x OCP NIC 3.0 PCIe Gen5 x16 slot
- Dual 2700W 80 PLUS Titanium redundant power supply

## Applications

AI Platform, AI Training Server, AI Inference Server, Visual Computing, High-Performance Computing Server, Networks Server, Servers for Hybrid/Private Cloud...

## Specification

Dimensions	1U (W448 x H43.5 x D900 mm)	PCIe Expansion Slots	4 x FHFL PCIe Gen5 x16, for GPUs 1 x FHFL PCIe Gen5 x16 <sup>[1]</sup> 1 x FHHL PCIe Gen5 x16 1 x <b>Internal</b> LP PCIe Gen4 x8 1 x OCP NIC 3.0 PCIe Gen5 x16, Support NCSI <sup>[1]</sup> Blocked when a Dual slot GPU is installed.
Motherboard	MSF3-GP0	I/O Ports	<b>Top:</b> 2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x MLAN
CPU	5th Generation Intel® Xeon® Scalable Processors 4th Generation Intel® Xeon® Scalable Processors Intel® Xeon® CPU Max Series Dual processor, TDP up to 350W	Backplane Board	PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
Socket	2 x LGA 4677 (Socket E)	TPM	1 x TPM header (SPI), Optional TPM2.0 kit: CTM010
Chipset	Intel® C741	Power Supply	Dual 2700W 80 PLUS Titanium redundant power supply AC Input: 100-240V *The system power supply requires C19 power cord.
Memory	8-Channel DDR5 RDIMM, 32 x DIMMs [5th Gen Intel Xeon] Up to 5600 MT/s (1DPC), 4400 MT/s (2DPC) [4th Gen Intel Xeon] Up to 4800 MT/s (1DPC), 4400 MT/s (2DPC) [Intel Xeon Max Series] Up to 4800 MT/s (1DPC), 4400 MT/s (2DPC)	System Management	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
LAN	1 x 10/100/1000 Mbps Management LAN	Operating Properties	Operating coolant: 25°C–35°C Non-operating: -40°C–60°C, 20%–95% (non-condensing)
Video	Integrated in ASPEED® AST2600 - 1 x Mini-DP	Packaging Content	1 x R183-SF2-IAL1 2 x CPU heatsinks 1 x Mini-DP to D-Sub cable 2 x GPU power cables (12VHPWR, 400mm) 1 x GPU power cable (12VHPWR, 500mm) 1 x GPU power cable (12VHPWR, 650mm) 6 x Carriers
Storage	<b>Bottom hot-swap:</b> 2 x 2.5" Gen5 NVMe/SATA/SAS-4 <sup>[1]</sup> <sup>[1]</sup> SAS card is required to support SAS devices.	Ordering Part Numbers	6NR183SF2DR000IBL1*
RAID	Intel® SATA RAID 0/1/10/5 Onboard VROC key header Support optional RAID add-in cards		



Learn more at: <https://www.gigabyte.com/Enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.  
\* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

