


# E263-Z30-AAV1

Edge Server - 2U UP 2 x PCIe Gen5 GPUs

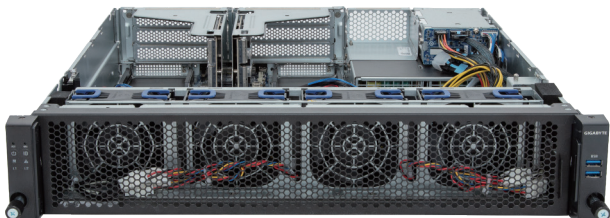

## Key Features

- Supports up to 2 x Dual slot Gen5 GPUs
- Single AMD EPYC™ 9004 Series Processors
- 12-Channel DDR5 RDIMM, 12 x DIMMs
- Dual ROM Architecture
- 1 x 1Gb/s LAN port via Intel® I210-AT
- 2 x 2.5" Gen4 NVMe/SATA/SAS hot-swap bays on rear side
- 1 x M.2 slot with PCIe Gen3 x4 interface
- 2 x FHFL PCIe Gen5 x16 slots for GPUs
- 2 x OCP NIC 3.0 PCIe Gen5 x16 slots
- 1+1 1600W 80 PLUS Titanium redundant power supplies

## Application

AI, AI Training, AI Inference, Visual Computing, Networking, Edge, Hybrid/Private Cloud Server...

## Specification

<b>Dimensions</b>	2U (W438 x H87.5 x D520 mm)	<b>I/O Ports</b>	Front: 2 x USB 3.2 Gen1 Rear: 2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x RJ45, 1 x MLAN
<b>Motherboard</b>	MZ33-DC0	<b>Backplane Board</b>	Bandwidth: PCIe Gen4 x4 or SATA 6Gb/s or SAS 12Gb/s
<b>CPU</b>	AMD EPYC™ 9005 Series Processors AMD EPYC™ 9004 Series Processors Single processor, cTDP up to 300W - At 30°C ambient, cTDP up to 400W	<b>Security Modules</b>	1 x TPM header with SPI interface (Optional TPM2.0 kit: CTM010)
<b>Socket</b>	1 x LGA 6096 (Socket SP5)	<b>Power Supply</b>	1+1 1600W 80 PLUS Titanium redundant power supplies AC Input: 100-240V
<b>Chipset</b>	System on Chip	<b>System Management</b>	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
<b>Memory</b>	12 x DIMM slots 12-Channel DDR5 RDIMM RDIMM: Up to 4800 MT/s	<b>OS Support</b>	Windows Server, Red Hat Enterprise Linux server, Ubuntu, SUSE Linux Enterprise server, VMware ESXi, Citrix Hypervisor
<b>LAN</b>	1 x 1Gb/s LAN (1 x Intel® I210-AT) - Supports NCSI 1 x 10/100/1000 Mbps Management LAN	<b>System Fans</b>	4 x 80x80x38mm (18,300rpm)
<b>Video</b>	Integrated in ASPEED® AST2600 - 1 x VGA port	<b>Operating Properties</b>	Operating temperature: 10°C to 35°C Operating humidity: 8%-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
<b>Storage</b>	Rear hot-swap: 2 x 2.5" Gen4 NVMe/SATA/SAS *SAS card is required to support SAS drives. Internal M.2: 1 x M.2 (2280/22110), PCIe Gen3 x4	<b>Packaging Content</b>	1 x E263-Z30-AAV1, 1 x CPU heatsink, 1 x Mini-DP to D-Sub cable, 2 x GPU power cables Packaging Dimensions: 732 x 588 x 285 mm
<b>RAID</b>	Require RAID add-in cards	<b>Part Numbers</b>	Barebone package (EPYC 9005/9004): 6NE263Z30DR000ABV1* Barebone package (EPYC 9004): 6NE263Z30DR000AAV1* Optional parts: - 2-Section Rail kit (385-480mm): 25HB2-3A0204-K0R - 2-Section Rail kit (660-840mm): 25HB2-3A0203-K0R
<b>Expansion Slots</b>	2 x FHFL PCIe Gen5 x16 slots for GPUs 2 x OCP NIC 3.0 PCIe Gen5 x16 slots - Supports NCSI		



Learn more at <https://www.GIGABYTE.com/enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.  
\* AMD, the AMD Arrow logo, EPYC and combinations thereof are trademarks of Advanced Micro Devices, Inc.  
\* All other brands, logos and names are property of their respective owners.

© 2024 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

