


R183-ZF1-AAJ1

Rack Server - 1U DP 1 x PCIe Gen5 GPU

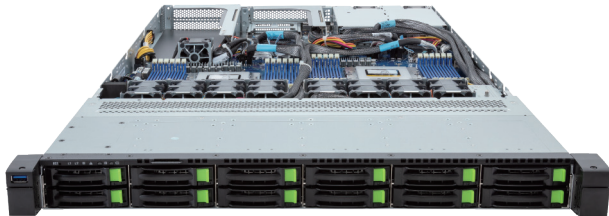

Key Features

- Supports 1 x Dual slot Gen5 GPU
- Dual AMD EPYC™ 9005/9004 Series Processors
- 12-Channel DDR5 RDIMM, 24 x DIMMs
- Dual ROM Architecture
- 12 x 2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 1 x FHFL PCIe Gen5 x16 slot for GPUs
- 1 x FHFL PCIe Gen5 x16 slot
- 1 x FHHL PCIe Gen5 x16 slot
- 1 x OCP NIC 3.0 PCIe Gen5 x16 slot
- 1+1 2000W 80 PLUS Titanium redundant power supplies

Application

AI, AI Inference, Visual Computing, Networking, Hybrid/Private Cloud Server

Specification

Dimensions	1U (W438 x H43.5 x D815 mm)	I/O Ports	Front: 1 x USB 3.2 Gen1 Rear: 2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x MLAN
Motherboard	MZF3-GP0	Backplane Board	Speed and bandwidth: PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
CPU	AMD EPYC™ 9005 Series Processors AMD EPYC™ 9004 Series Processors Dual processor, cTDP up to 400W	Security Modules	1 x TPM header with SPI interface - Optional TPM2.0 kit: CTM010
Sock	2 x LGA 6096 (Socket SP5)	Power Supply	1+1 2000W 80 PLUS Titanium redundant power supplies AC Input: 100-240V
Chipset	System on Chip	System Management	ASPEED® AST2600 Baseboard Management Controller GIGABYTE Management Console web interface
Memory	12-Channel DDR5 RDIMM, 24 x DIMMs [EPYC 9005] Up to 6000 MT/s [EPYC 9004] Up to 4800 MT/s	OS Support	Windows Server, Red Hat Enterprise Linux server, Ubuntu, SUSE Linux Enterprise server, VMware ESXi, Citrix Hypervisor
LAN	2 x 1Gb/s LAN (1 x Intel® I350-AM2) - Supports NCSI function 1 x 10/100/1000 Mbps Management LAN	System Fans	1 x 40x40x28mm (34,000rpm), 8 x 40x40x56mm (32,000rpm)
Video	Integrated in ASPEED® AST2600 - 1 x Mini-DP	Operating Properties	Operating temperature: 10°C to 30°C Operating humidity: 8%-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
Storage	Front hot-swap: 12 x 2.5" Gen5 NVMe/SATA/SAS-4 *SAS card is required to support SAS drives.	Packaging Content	1 x R183-ZF1-AAJ1, 2 x CPU heatsinks, 1 x GPU power cable, 1 x Mini-DP to D-Sub cable, 1 x 2-Section Rail kit Packaging Dimensions: 1038 x 588 x 273 mm
RAID	Require RAID add-in cards	Part Numbers	Barebone package: 6NR183ZF1DR000ACJ1* Optional parts: - 3-Section Rail kit (Supports CMA): 25HB2-A56121-K0R - Cable Management Arm: 25HB1-R18300-K0R - RMA packaging: 6NR183ZF1SR-RMA-A100
Expansion Slots	1 x FHFL PCIe Gen5 x16 slot for GPUs 1 x FHFL PCIe Gen5 x16 slot 1 x FHHL PCIe Gen5 x16 slot 1 x OCP NIC 3.0 PCIe Gen5 x16 slot		



Learn more at <https://www.GIGABYTE.com/enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.
* AMD, the AMD Arrow logo, EPYC and combinations thereof are trademarks of Advanced Micro Devices, Inc.
* All other brands, logos and names are property of their respective owners.

© 2024 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

